

FOUR-DIMENSIONAL
LUXURY AND TECHNOLOGY.



EIKON

 **VIMAR**



EIKON

EIKON TACTIL

EIKON EVO

EIKON CHROME

EIKON TOTAL LOOK

FOUR AESTHETIC DIMENSIONS.

Tactil, Evo, Chrome, Total Look: luxury becomes matter. Eikon expresses this in four ranges with different designs, finishings and functions, all sharing a common denominator: superlative energy management.





ULTIMATE TECHNOLOGICAL EXPRESSION.

Formal elegance embodies avant-garde functions. Like those which bring life to By-me home automation: intuition and simplicity, supporting full control and total safety.

EIKON TACTIL



THE FUTURE TAKES SHAPE.
A technological jewel as pure as a diamond
and as light as a feather.



TOUCH FUNCTION.

THE LIGHTEST TOUCH,
AND ENERGY IS UNDER CONTROL.



PROXIMITY SENSOR.

THE ELECTRONIC CONTROLS SENSE WHEN YOU ARE NEAR THE
DEVICE AND SWITCH IT ON, READY FOR USE.



PURE CRYSTAL.

A PRECIOUS MATERIAL, IN 4 COLOURS:
WHITE DIAMOND, BLACK DIAMOND, PEARL GREY AND AQUA.

LUMINOSI

BEVELLED CRYSTAL



Black diamond



White diamond

LUMINOSI

BEVELLED CRYSTAL



Aqua




Pearl grey

EIKON EVO




LUXURY UNVEILED.
With a style and a technology that add unique,
irresistible value to all your everyday gestures.

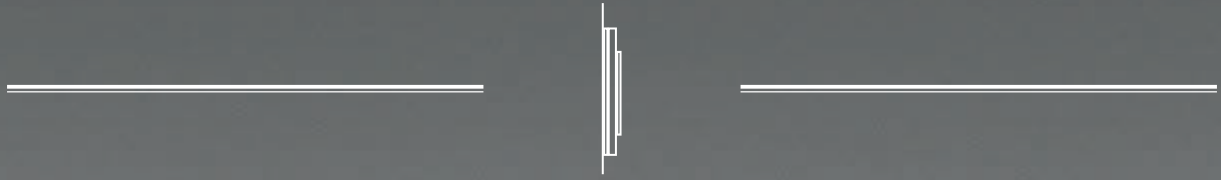

ULTRA-SLIM PROFILE.

A LIGHTWEIGHT, SLIM SILHOUETTE THAT STANDS OUT JUST A FEW MILLIMETRES FROM THE WALL, WITH AXIAL BUTTONS.



ELEGANT GEOMETRIES.

SHAPES THAT ARE DESIGNED TO CATCH THE EYE, RIGOROUS AND ELEGANT, IN SIZES THAT ARE UNOBTRUSIVE ON THE WALL.



EXCLUSIVE MATERIALS.

EIGHT DIFFERENT PRECIOUS MATERIALS, CAPTURING THE LATEST INTERIOR LIVING TRENDS.

PRIMARI

ANODIZED ALUMINIUM



Brilliant aluminium



Next grey



Neutral bronze



Dark bronze



Lava grey

ESCLUSIVI

REFINED ALUMINIUM



Silver



Titanium



Polished gold




Satin gold



Black sapphire

RAFFINATI

NATURAL LEATHER



Cream



Tobacco

SPECIALI

CORIAN®



Glacier ice

SCOLPITI

CARVED STONE



Carrara white



Grey quartzite



Natural split slate

NATURALI

SOLID WOOD



White oak



Italian walnut



Wengé

ESSENZIALI

TOTAL ALUMINIUM AND CRYSTAL



Total white



Total black



Total white diamond



Total black diamond

LUMINOSI

BEVELLED CRYSTAL



Silver ice



Bronze mirror



White diamond



Aqua



Pearl grey



Opal brown



Black diamond

EIKON CHROME



DAZZLING DETAILS.
A new definition of style where detail is supreme.



CHROME FRAME.

SHINY AND SMOOTH, A DISTINCTIVE FEATURE SURROUNDING BUTTONS AND CONTROLS.



LINEAR OR ROUNDED?

EIKON CHROME RESPONDS TO ALL NEEDS WITH ITS CLASSIC AND ROUND DESIGNS.



MATERIALS AND COLOURS.

PRESTIGE ALSO COMES IN THE FIVE SELECTED MATERIALS AND THE MANY COLOUR VARIANTS.

BRIGHT

VARNISHED METAL - CLASSIC



Arctic white



Antique white



Metallic champagne



Metallic titanium



Metallic silver



Metallic Siena



Metallic anthracite



Matt silver



Matt titanium



Matt anthracite

VARNISHED METAL - ROUND



Arctic white



Antique white



Metallic champagne



Metallic titanium



Metallic atlantic grey



Metallic silver



Metallic anthracite



Matt silver



Matt titanium



Matt anthracite

REFINED


REFINED METAL - CLASSIC



Satin gold



Satin nickel



Polished gold

REFINED METAL - ROUND



Satin gold



Satin nickel



Polished gold



Satin chrome

WOOD

SOLID WOOD - CLASSIC



African wengé



White oak



Italian walnut

SOLID WOOD - ROUND



American cherrywood



White oak



Italian walnut

INOX

STAINLESS STEEL - CLASSIC



Brushed inox

STAINLESS STEEL - ROUND



Brushed inox

GLASS

CRYSTAL - CLASSIC



Black ice



White ice



Silver mirror

EIKON TOTAL LOOK



HARMONY IN COORDINATING COLOURS.

Three essential colours for cover plates,
frames, buttons and controls.



THREE COLOURS.

WHITE, ANTHRACITE GREY AND NEXT SILVER:
BUTTONS AND DEVICES ARE FULLY COLOUR-COORDINATED
WITH THE COVER PLATES AND FRAMES.



TWO SHAPES.

RIGOROUS PROFILES OR SINUOUS LINES?
EACH DESIGN HAS ITS OWN STYLE.



UNIQUE MATERIAL.

METAL, A PRECIOUS FUNCTIONAL AND DESIGN CHOICE.

BRIGHT

VARNISHED METAL - CLASSIC



Matt anthracite



Arctic white



Matt silver

BRIGHT

VARNISHED METAL - ROUND



Matt anthracite



Arctic white



Matt silver



SPECTACULAR
TECHNOLOGY, PRECISE AND
ATTENTIVE. IN A NUTSHELL,
CUTTING-EDGE.

INTELLIGENT, INTUITIVE FUNCTIONS FOR MANAGING ENERGY.

SUPERVISION

The 10" multimedia Video Touch screen manages and controls everything that happens inside and outside the home, with high-definition images and coordinated, customised graphics. The web interface offers remote control via smartphone, PC and tablet.



10" multimedia video touch screen

COMMUNICATION

The 4,3" video touch screen offers complete control over all the video door entry and home automation functions.



4,3" video touch screens

EFFICIENCY

The 4,3" Full Flat touch screen controls the entire home, providing precise information on the energy profile and consumption of the whole home or of each individual device.



4,3" Full Flat touch screen

ALL YOUR LIVING DESIRES ASSURED DOWN TO THE FINEST DETAIL.

AESTHETIC COORDINATION

Technology that allows you to coordinate the appearance of every application perfectly: monitoring, controls and connection to any network. A coordinated, complete device, where design stands side by side with functional excellence.



3-module touch screen



Eikon Tactil controls



Outlets

COLOURS

Three different colours for buttons and controls, from light white to rigorous anthracite grey, passing through elegant Next silver. In the name of a technology that has never been separated from design.



Anthracite grey



White



Next

COMPLETE CONTROL

A wide range of control devices for all your installation needs. Soft-action axial controls, with wireless and battery-free radio-controlled technology, electronic infrared or touch versions with home automation intelligence. The whole home responds to your commands, all functions can be coordinated in a scenario and be controlled remotely from a latest generation PC, smartphone or tablet.



Axial controls



Eikon Tactil home automation control



Home automation controls

EFFICIENT COMFORT

Touch devices to manage widespread well-being, like music playing in all the rooms, universal dimmers to set the lighting and play with coloured lights, timer-thermostats ensuring just the right temperature at any time of the day, room by room, and modular lighting to see clearly in any situation. Efficient technology that guarantees maximum comfort.



3-module touch screen for temperature control



Universal light dimmers



Timer-thermostat

OPTIMISED ENERGY

Don't waste energy. Ever! Thermostats that adjust the temperature to actual everyday needs; devices that control electrical loads, monitor consumption and show produced energy; programmable timer-switches that switch the devices on at the right time. Rational management of all your home energy, because Eikon also means energy awareness.



Programmable timer-switch



Load control




3-module touch screen for load management

RELIABLE SECURITY

Excellent technology, silently protecting people and their homes, at all times. And if there's an alarm, you'll receive a text or an e-mail, wherever you are. Different kinds of burglar alarms; surveillance cameras for every room, gas detectors to report and block any leaks and interlocked sockets protecting against accidental contacts.



Digital keypad

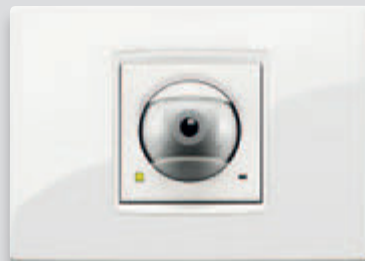


Video camera with microphone and light



Methane gas detector

SURPRISING MULTIMEDIA MANAGEMENT

Connection to the outside world, or pure enjoyment: technology also means this. Eikon offers extraordinary multimedia performance with its high quality sound system, the wide range of data, audio, video and USB sockets and its compatibility with iPods, iPhones and MP3 players.

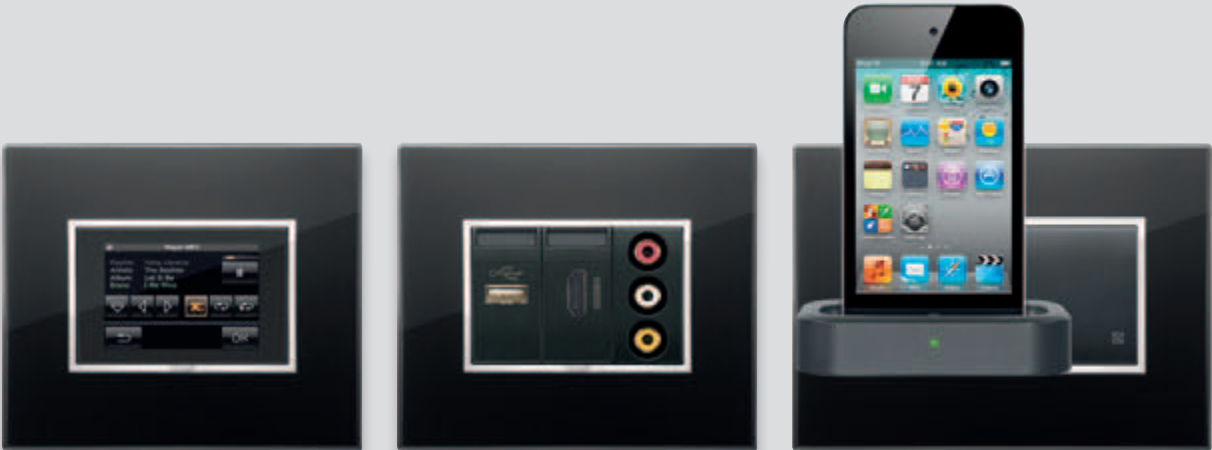

Sound system touch screen

USB, HDMI, RCA sockets

Docking station

INTERNATIONAL VOCATION

Wherever you are in the world, Eikon supplies sockets with different standards, modular controls and cover plates to help you design, organise and manage energy in compliance with the systems used in over 100 countries around the world.



Installation versatility

Different modules

BY-ME. HOME AUTOMATION ENSURING CONTROL, COMFORT, EFFICIENCY AND SAFETY. THROUGHOUT THE HOME.



GLOBAL MONITORING

Easy-to-surf technology used to control the different parts of the home, setting scenarios, adjusting the temperature, managing lighting and automated devices in each one.



BURGLAR ALARM MONITORING

It can manage the whole burglar alarm system, or any of the single parts it can be divided into.



SOUND SYSTEM


Play and control music from an MP3 player, iPod or smartphone in any room.



ENERGY OPTIMISATION

Offers an overview of the whole system, allowing you to monitor the consumption of every device.

Eikon interacts with the By-me system, dialoguing continuously with the home to ensure constant monitoring and well-being, in line with individual needs. Coordinated functions that are easy to use with a high technological content, making everyday actions easier and simpler.

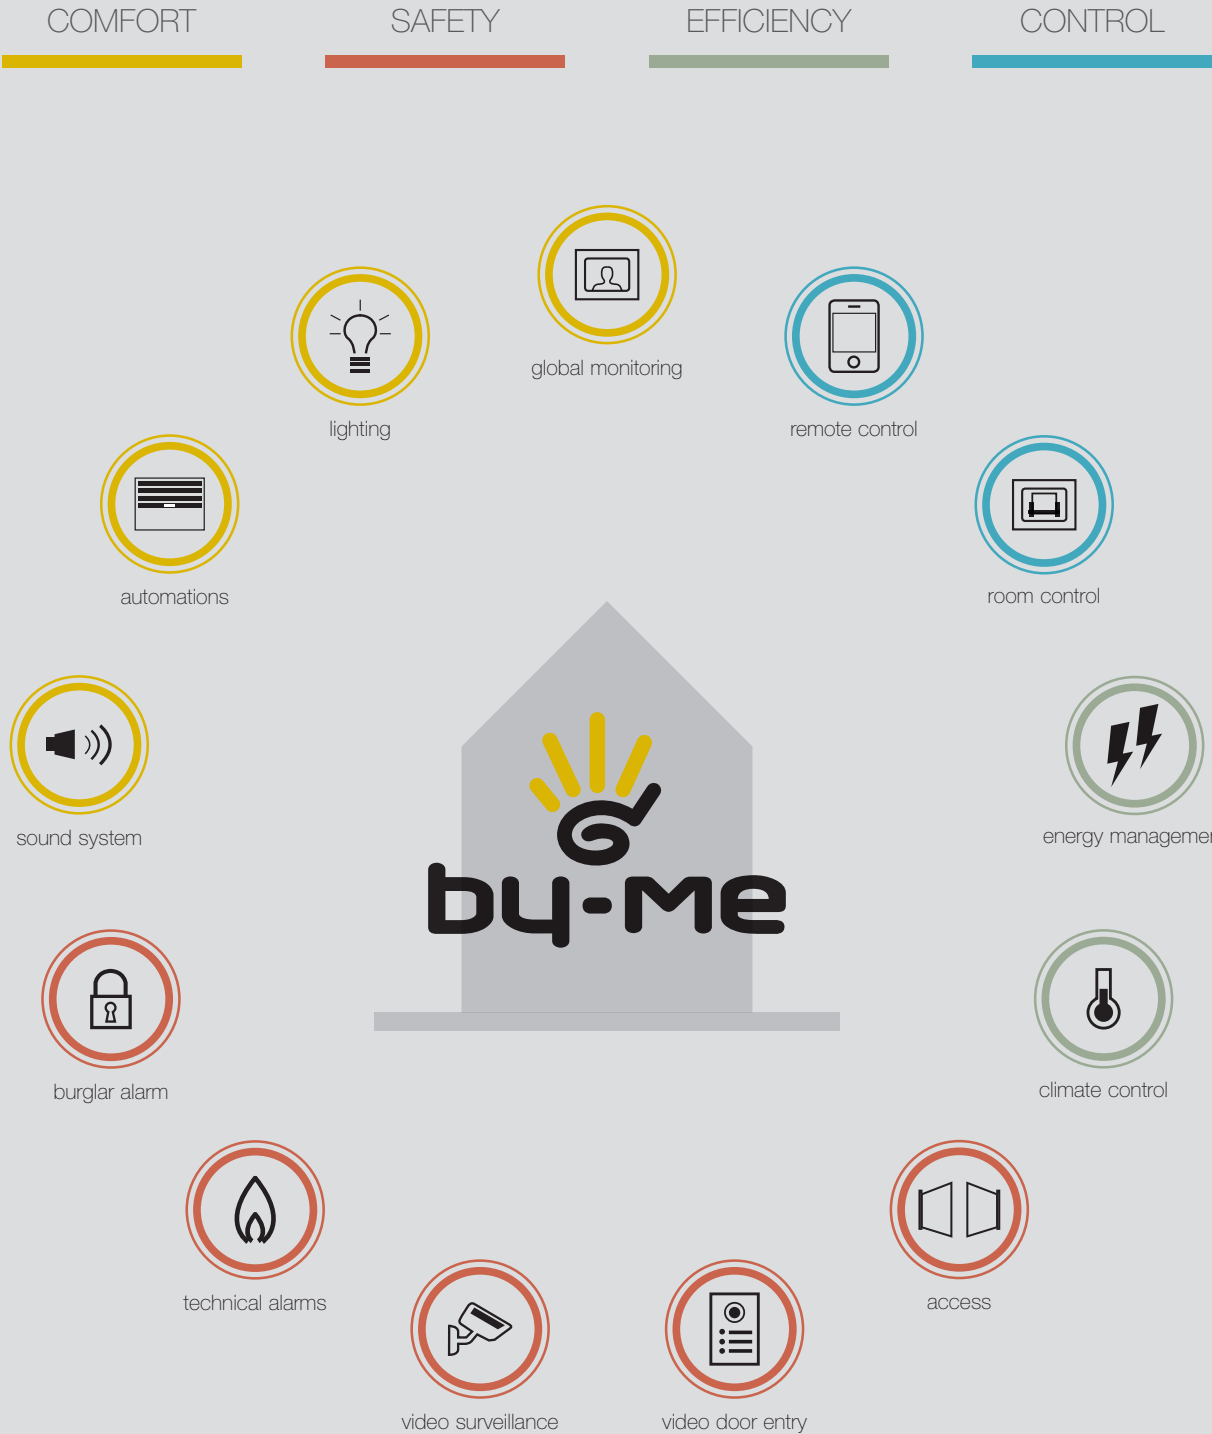

WELL-CONTACT PLUS. AUTOMATIONS, ENTRY, HVAC AND LIGHTING, UNDER CONTROL IN EVERY BUILDING.



GLOBAL MONITORING

Automation, entry, HVAC and energy saving are managed by a single system developed to the KNX standard.



ROOM CONTROL

Clients have immediate, intuitive supervision of each room, enabling their favourite comfort scenarios.



CLIMATE CONTROL


Intelligent, customised temperature management in every room.



ACCESS

Different devices for managing entry to every office or hotel room, guaranteeing maximum security.

Eikon solutions can be perfectly applied to hotels, offices, management centres, shopping centres and gyms. Managed in a simple, intelligent and coordinated manner with the Well-contact Plus system. This hardware, developed to standard KNX technology, can be incorporated in other technological systems in the building, for controlling lights, temperature, energy, entries and automations. For fully integrated design and technology.

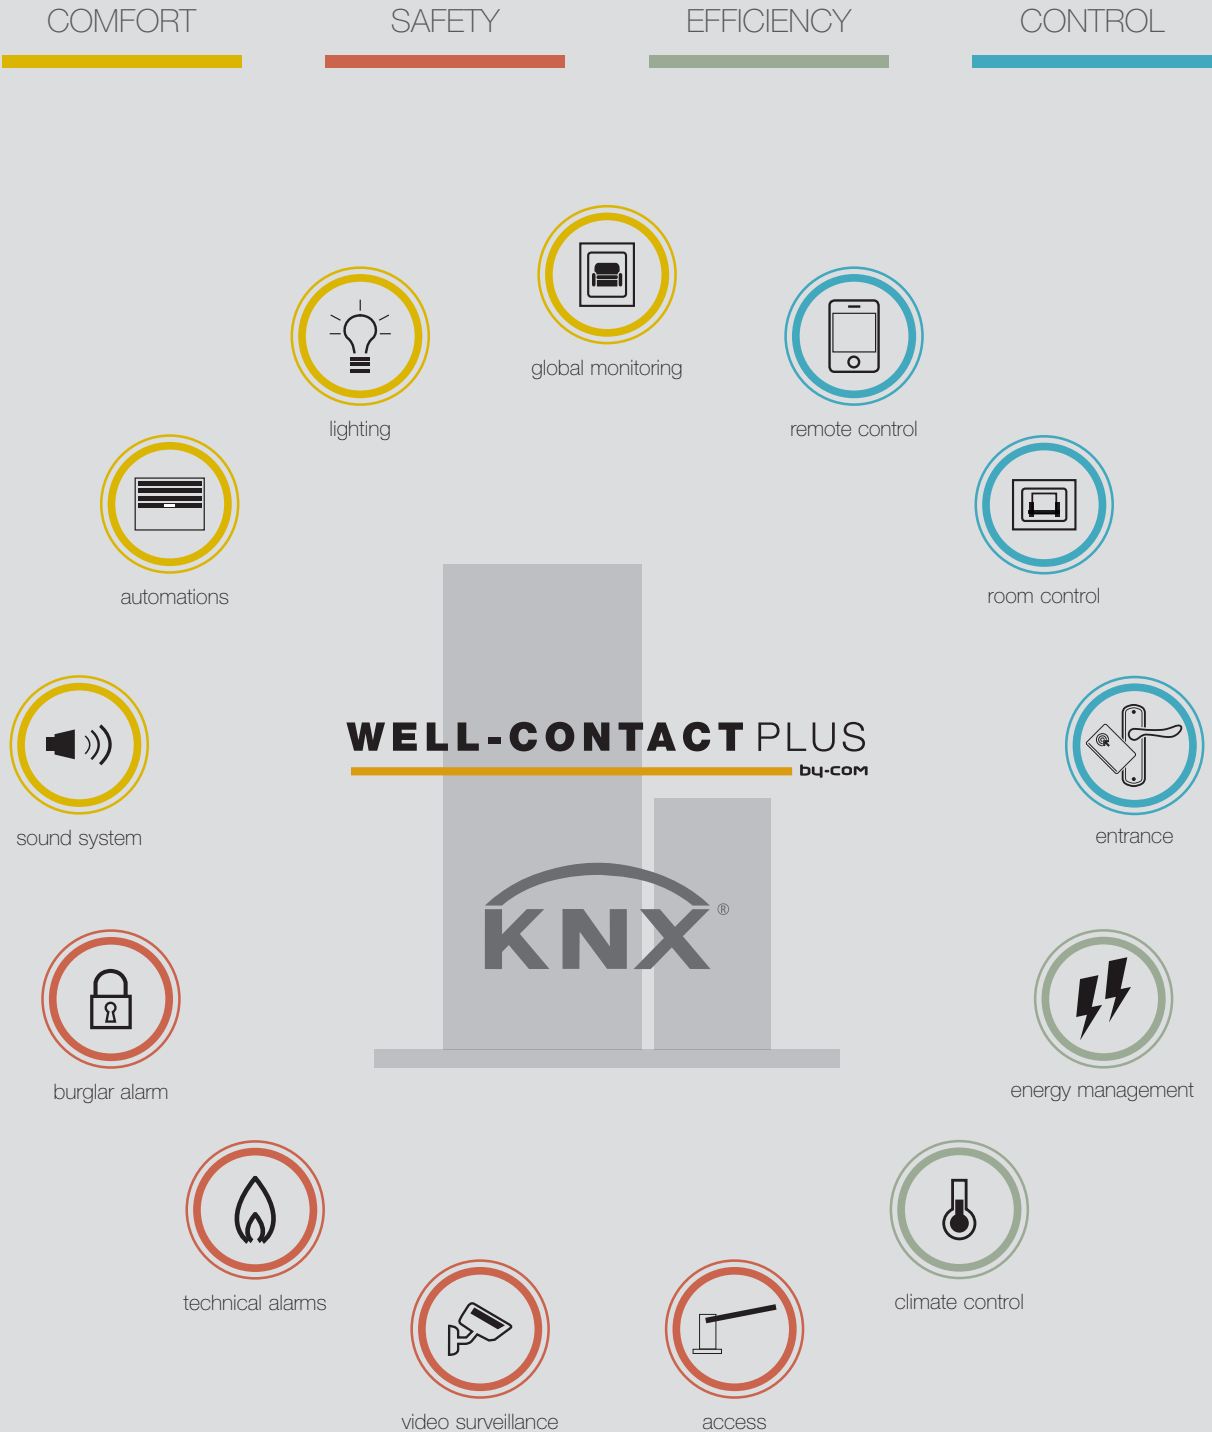




Eikon Tactil

Electronic controls with proximity sensor

Eikon Tactil is intelligence, it reads your mind: the proximity sensor brings conventional and home automation devices to life as soon as you come near the device, one step ahead of your movements. The controls light up, ready for your touch.

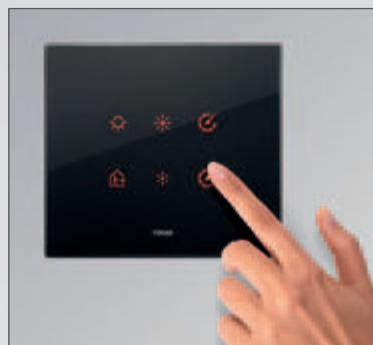


With the patented Vimar technology, these controls recognise your touch in any condition, even when wearing gloves.



Axial, rocker and touch controls

Three different coloured buttons, modularity and freedom to customise: Eikon responds to any installation and beauty demand. Lots of different commands: axial, rocker, infrared, all with the technological precision guaranteed by Vimar.

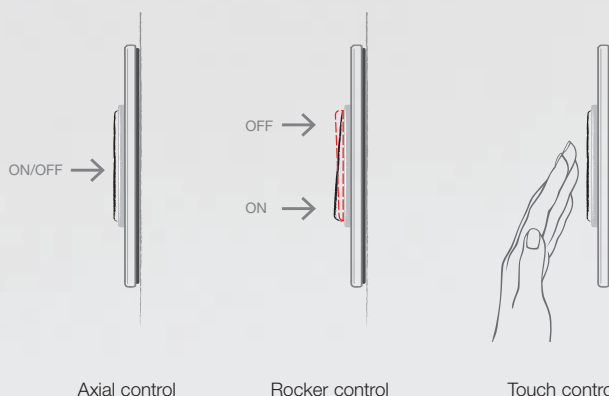


Button colours

Available in anthracite grey, white or Next. Eikon dresses in the colours that best suit contemporary interiors, offering great design freedom.



Customization

Buttons with laser engraved or customised with Mylar labels with symbols chosen from our customisation library, or requested by the customer. To clearly indicate the function associated to the control.



Controls

Soft action: precision and silence

With soft action technology, the rocker and axial controls move silently and precisely, with minimum protrusion from the wall. A soft, muted sound accompanies the silky feel of the buttons - with one, two or three fully interchangeable modules - ensuring the best in comfort.

The spring geometry of the moving contact of the mechanism performs a natural cushioning function, reducing its electrical recoils and wear, also thanks to a large increase in the quantity of silver of the contacts.




Movement of the button

Moving spring contact

Plack-clack mounting

A Vimar patent that makes it quicker and easier to fit the lighting devices to the cover plate. A slot in system offering greater structural strength and exceptional rigidity, making the front fitting and removal of devices easier. This allows you to work on the system without having to remove the support.

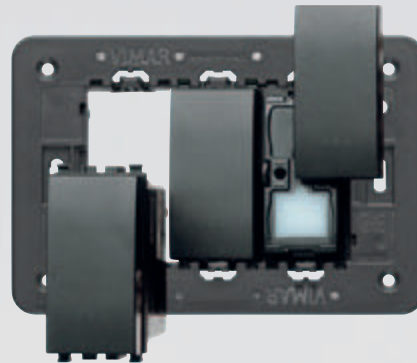

Lowered support with steel core

Just 2 mm thick, this support is in any case strong, flexible and insulated, with a steel core and a galvanised, anti-oxidant coating. Cover plates protrude just a few millimetres from the wall without compromising on the rigidity and flexibility required to respond to a wide range of installation needs. Wrapped in a layer of top quality technopolymer, the new support ensures full electrical insulation and simple and immediate insert attachment.



Visibility

Buttons visible even in the dark, fitted with an efficient, low energy LED technology signalling unit underneath. For a warm light, available in a range of colours and coordinated with the electronic device displays.



Ergonomic contacts

The metal plate in the Eikon terminals is curved: a Vimar solution to hold the wire in place until the screw is tightened.



Mounting features for Eikon Tactil


Cover plates.

Large, square size, from 2 to 4 modules. In crystal and 4 colours: white diamond, aqua, pearl grey and black diamond.



Electronic controls.

1, 2 and 3 back-lit modules. The standard controls have amber backlighting when installed in a conventional electrical system. The backlighting can be programmed with RGB colours when mounted in a By-me or Well-contact Plus automation systems.

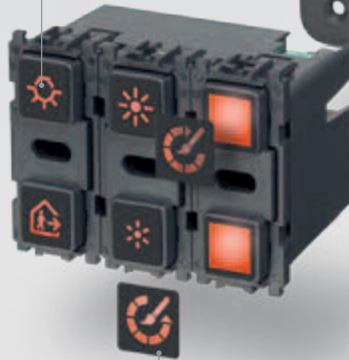


Mylar adhesive labels.

The controls can be customised using the Mylar adhesive labels with a range of symbols, all back-lightable.




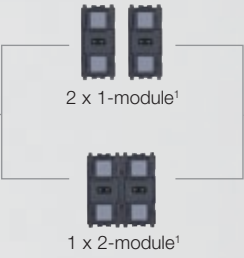




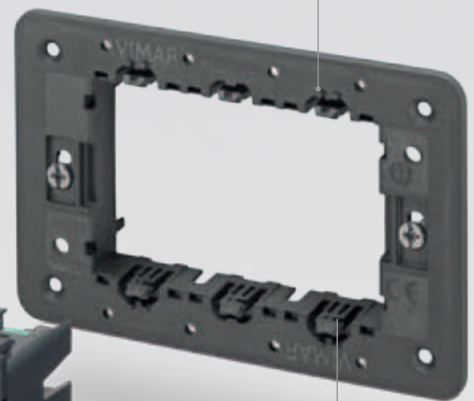






Ultra-slim support.

Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.

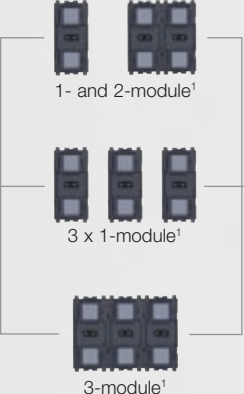

Plack-clack system.


The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

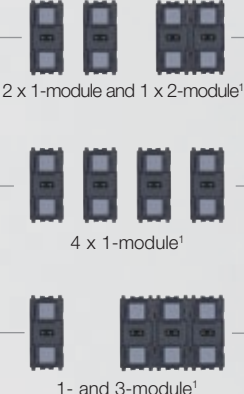Composition	Box	Frame	Device	Cover plate
 <p>2 modules</p>	 <p>Flush mounting</p>	 <p>2-module with/without screws or with claws</p>	 <p>2 x 1-module¹ 1 x 2-module¹</p>	 <p>2 modules</p>
 <p>3 modules</p>	 <p>Flush mounting</p>	 <p>With screws</p>	 <p>1- and 2-module¹ 3 x 1-module¹ 3-module¹</p>	 <p>3 modules</p>
 <p>4 modules</p>	 <p>Flush mounting</p>	 <p>With screws</p>	 <p>2 x 1-module and 1 x 2-module¹ 4 x 1-module¹ 1- and 3-module¹</p>	 <p>4 modules</p>

* For other combinations, see the installation types from page 88

¹ To customise with Mylar adhesive labels (21847)

Mounting features for Eikon Evo Italian standard

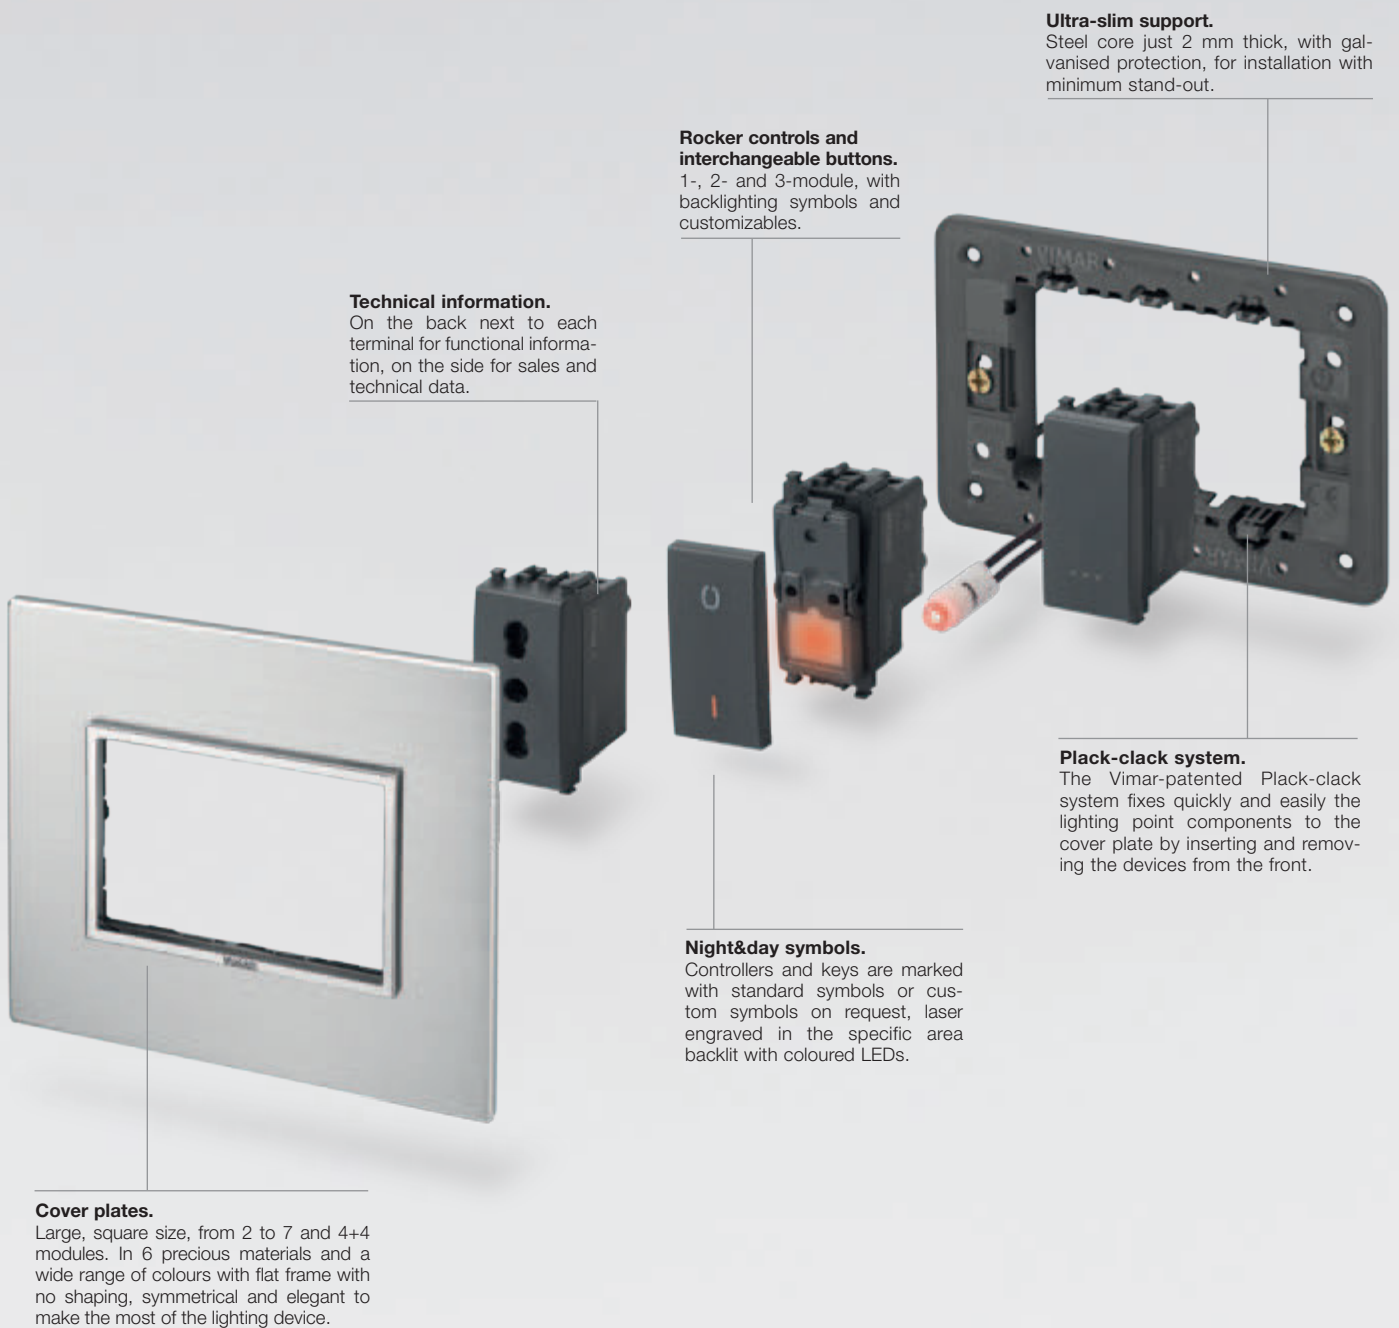

Technical information.
On the back next to each terminal for functional information, on the side for sales and technical data.

Rocker controls and interchangeable buttons.
1-, 2- and 3-module, with backlighting symbols and customizables.

Ultra-slim support.
Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.

Plack-clack system.
The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Night&day symbols.
Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.

Cover plates.
Large, square size, from 2 to 7 and 4+4 modules. In 6 precious materials and a wide range of colours with flat frame with no shaping, symmetrical and elegant to make the most of the lighting device.

Composition	Box	Frame	Device	Cover plate
 <p>2 modules</p>	 <p>Flush mounting ø 60 mm or 56x56 mm</p>	 <p>With/without screws</p>	 <p>2 x 1-module 1 x 2-module</p>	 <p>2 modules</p>
 <p>From 3 to 7 modules</p>	 <p>Flush mounting from 3 to 6 modules</p>	 <p>With screws</p>	 <p>3 x 1-module 1- and 2-module 1 x 3-module</p>	 <p>From 3 to 7 modules*</p>
 <p>10" multimedia video touch</p>	 <p>Semi-flush mounting</p>			 <p>Cover plate for multimedia video touch 10"</p>
 <p>4,3" Full Flat touch screen</p>	 <p>Flush mounting</p>	 <p>With screws</p>	 <p>4,3" Full Flat touch screen</p>	 <p>8 modules cover plate*</p>
 <p>4,3" Full Flat video touch</p>			 <p>2 x 1-module and 1 x 2-module</p>	

* For other combinations, see the installation types from page 92

Mounting features for Eikon Evo German standard - 71 mm

Ultra-flat mounting frame with metal core.

Just 2 mm thick, it guarantees strength, flexibility and electric insulation. The metal core has a galvanised, anti-oxidant coating and attaches devices quickly and easily. Wide range of installation possibilities because of the 71 mm between centres.

Plack-clack system.


The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Interchangeable buttons
1- and 2-module, with backlighting symbols and customizables.









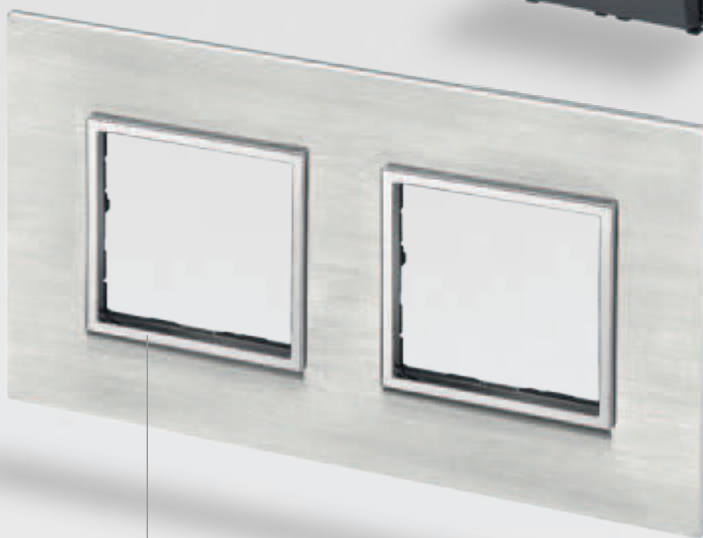












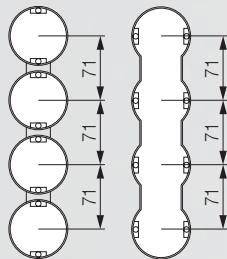
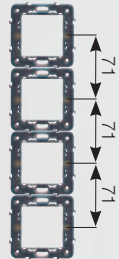






Technical information

On the back next to each terminal for functional information, on the side for sales and technical data.




Multi-module cover plates

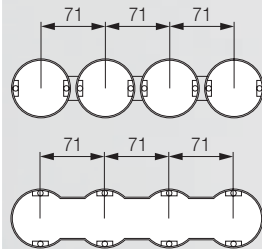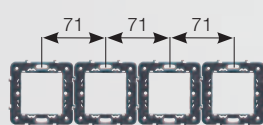Wide range of cover plates, from 2+2 to 2+2+2+2 modules, for safe and functional vertical and horizontal installation for any country.

Composition	Box	Frame	Device	Cover plate
 2+2 modules		 With/without screws with 71 mm between centres	 2 x 2 modules	 2+2 modules, vertical installation
		 With/without screws with 71 mm between centres	 2 x 2 modules	 2+2 modules, horizontal installation
 2+2+2 modules		 With/without screws with 71 mm between centres	 3 x 2 modules	 2+2+2 modules, vertical installation
		 With/without screws with 71 mm between centres	 3 x 2 modules	 2+2+2 modules, horizontal installation
 2+2+2+2 modules		 With/without screws with 71 mm between centres	 4 x 2 modules	 2+2+2+2 modules, vertical installation
		 With/without screws with 71 mm between centres	 4 x 2 modules	 2+2+2+2 modules, horizontal installation

* For other combinations, see the installation types from page 96

Mounting features for Eikon Chrome and Eikon Total Look

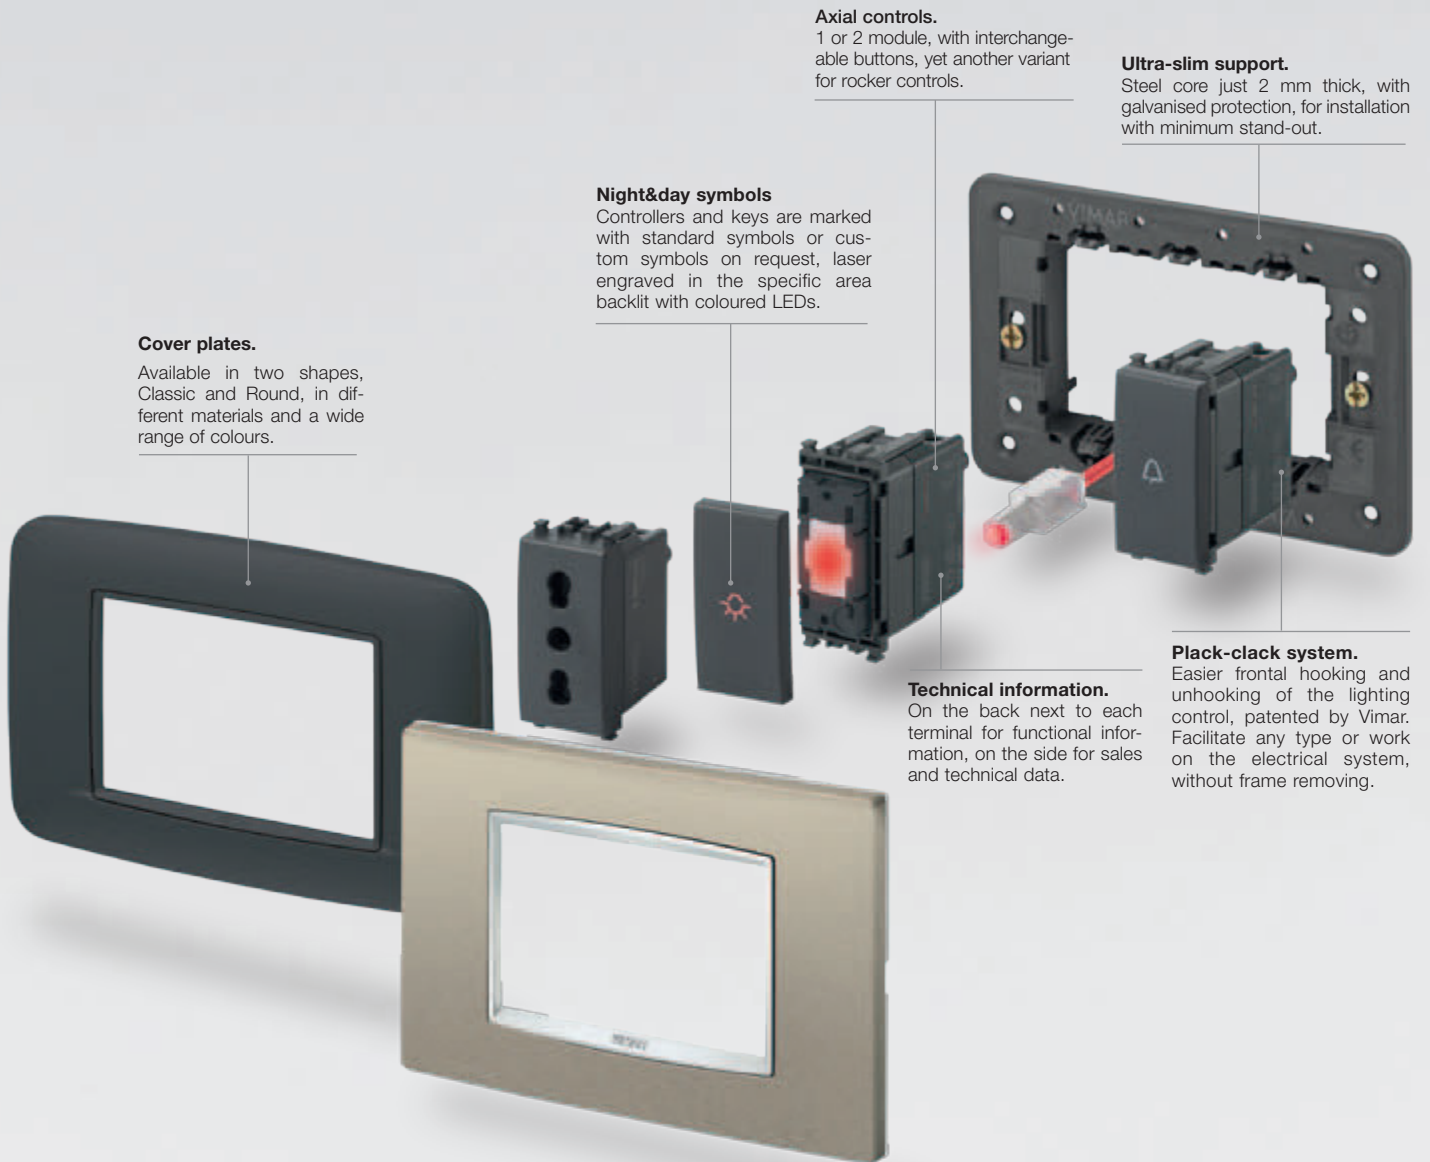

Cover plates.

Available in two shapes, Classic and Round, in different materials and a wide range of colours.

Night&day symbols

Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.

Axial controls.

1 or 2 module, with interchangeable buttons, yet another variant for rocker controls.

Ultra-slim support.

Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.

Plack-clack system.

Easier frontal hooking and unhooking of the lighting control, patented by Vimar. Facilitate any type or work on the electrical system, without frame removing.

Technical information.


On the back next to each terminal for functional information, on the side for sales and technical data.

Composition	Box	Frame	Device	Cover plate
<p>Panel mounting</p>	<p>Panel mounting</p>	<p>With screws</p>	<p>1-module</p>	<p>From 1 to 2 modules Classic or Round* (only for Eikon Total Look)</p>
<p>From 1 to 2 modules</p>	<p>Flush mounting</p> <p>Surface mounting</p>	<p>2-module with/without screws or with claws</p>	<p>2 x 1-module 1 x 2-module</p>	<p>From 1 to 2 modules Classic or Round*</p>
<p>For 2 central modules</p>	<p>Flush mounting</p>	<p>With screws</p>	<p>2 x 1-module 2-module</p>	<p>2-central-module Classic or Round*</p>
<p>From 3 to 7 modules</p>	<p>Surface mounting</p>	<p>With screws</p>	<p>1 and 2-module 3 x 1-module 1 x 3-module</p>	<p>From 3 to 7 modules Classic or Round*</p>
<p>8 modules</p>	<p>Flush mounting</p>	<p>With screws</p>	<p>Touch screen 4,3" "Energy" 2 x 1-module and 1 x 2-module 4 x 1-module</p>	<p>8 modules Classic or Round*</p>
<p>Table mounting</p>	<p>Table box</p>	<p>With screws</p>	<p>1 and 3-module</p>	<p>4 and 7 modules Classic or Round*</p>

* For other combinations, see the installation types from page 108

Mounting features for Eikon British standard

Modular devices mounting

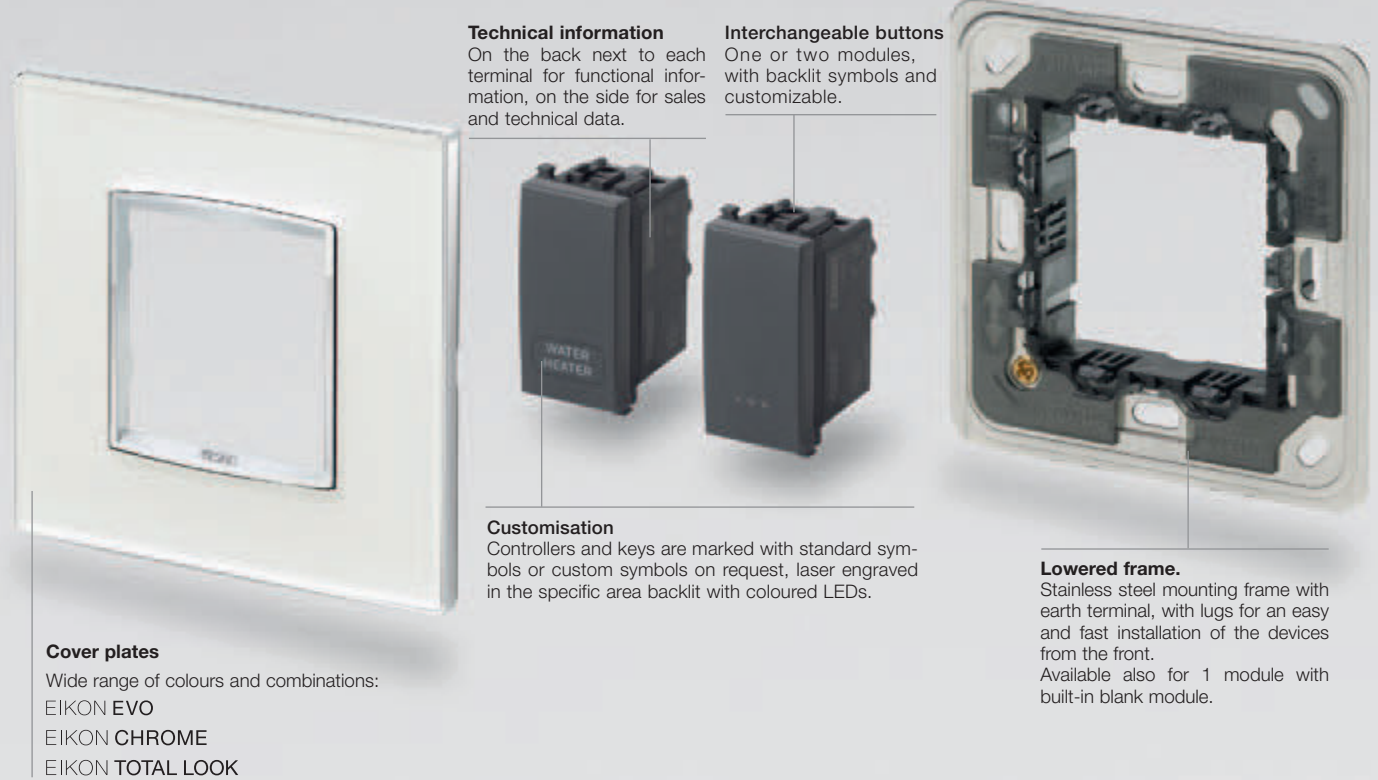

Technical information
On the back next to each terminal for functional information, on the side for sales and technical data.

Interchangeable buttons
One or two modules, with backlit symbols and customizable.

Customisation
Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.

Lowered frame.
Stainless steel mounting frame with earth terminal, with lugs for an easy and fast installation of the devices from the front. Available also for 1 module with built-in blank module.

Cover plates
Wide range of colours and combinations:
EIKON EVO
EIKON CHROME
EIKON TOTAL LOOK

Monobloc device (with built-in mounting frame)



Socket outlet
With SICURY patented system to prevent accidental contacts.

Monobloc device
Built-in mounting frame.

Fixing lugs
Possibility of horizontal and vertical mounting of device.

Signalling LED
Signalling of power supply, with integrated signalling unit, perfectly visible by day and night.

Matching possibility

Cover plates
For vertical and horizontal mounting

Joining possibility with minimum 25 mm of distance between boxes

Composition	Box	Frame	Device	Cover plate
<p>1 module, modular mounting (1-gang)</p>	<p>1-gang mounting box Fixing centres: 60,3 mm</p>	<p>1-module with screws M 3,5</p>	<p>1-gang switch, 1 module</p>	<p>From 1 to 2 modules*</p>
<p>2 modules, modular mounting (1-, 2-, 3-gang switch)</p>	<p>1-gang mounting box Fixing centres: 60,3 mm</p>	<p>2-module with screws M 3,5</p>	<p>3-gang switch, 2 modules 2 x 1-gang switches, 1 module 1-gang switch, 2 modules</p>	<p>From 1 to 2 modules*</p>
<p>monobloc device</p>	<p>1-gang mounting box Fixing centres: 60,3 mm</p>		<p>Socket outlet monobloc device ON/OFF unit monobloc device</p>	<p>monobloc horizontal mounting* monobloc vertical mounting*</p>
<p>monobloc device or 5 modules modular mounting</p>	<p>2-gang mounting box Fixing centres: 120,6 mm</p>	<p>5-module with screws M 3,5</p>	<p>2-gang switched socket outlets monobloc device 2 x 2-module + 1 x 1-module</p>	<p>5 modules*</p>

* For other combinations, see the installation types from page 100 and 114

Devices

EIKON TACTIL

Blank modules



■ **21041**
Blank module.
Depth: 11 mm

Electronic devices



■ **21119**
NO 6 A 230 V~ relay
output, supply voltage
230 V~ 50/60 Hz.
Depth: 42,5 mm



■ **21174**
For $\cos\phi$ 0,6 2 A 230 V~
roller shutters laths
adjustment.
Depth: 42,5 mm



■ **21122**
Electronic remote control, 2 push
buttons for the remote control of
a single or centralized control.
Depth: 42,5 mm

230 V~ 50 Hz dimmers



■ **21134**
MASTER, 40-500 W, 40-300 VA,
CFL 10-200 W, LED 3-200 W.
Depth: 42,5 mm

By-me - Electronic devices



■ **21520**
4 programmable buttons for
2 single controls or scenes
- 2 modules.
Depth: 38 mm



■ **21540**
6 programmable buttons for
3 single controls or scenes
- 3 modules.
Depth: 38 mm

Well-contact Plus - Electronic devices



■ **21840**
4 independently programmable
buttons for single controls or
scenes, KNX standard
- 2 modules. Depth: 38 mm



■ **21860**
6 independently programmable
buttons for single controls or
scenes, KNX standard
- 3 modules. Depth: 38 mm

Labels



■ **21847**
8 sheets of stickers with
symbols and words for
Eikon Tactil devices
















Devices

Grey	White	Next
------	-------	------

Blank modules and cable outlets

 20041 Blank module. Depth: 11 mm	 20044 Cable outlet. Depth: 16,6 mm	 20041.B Blank module. Depth: 11 mm	 20044.B Cable outlet. Depth: 16,6 mm	 20041.N Blank module. Depth: 11 mm	 20044.N Cable outlet. Depth: 16,6 mm
 20042 Blank module - 2 modules. Depth: 11 mm		 20042.B Blank module - 2 modules. Depth: 11 mm		 20042.N Blank module - 2 modules. Depth: 11 mm	
 20046² Cable outlet + terminalbar 20 A. Depth: 22,1 mm	 20047² 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm	 20046.B² Cable outlet + terminalbar 20 A. Depth: 22,1 mm	 20047.B² 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm	 20046.N² Cable outlet + terminalbar 20 A. Depth: 22,1 mm	 20047.N² 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm
 20049.L³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm	 20049.L.B³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm	 20049.L.N³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm			

1P 1-way switches 250 V~ (lightable°)

 20001 16 AX. Depth: 25 mm	 20001.2 16 AX - 2 modules. Depth: 25 mm	 20001.B 16 AX. Depth: 25 mm	 20001.2.B 16 AX - 2 modules. Depth: 25 mm	 20001.N 16 AX. Depth: 25 mm	 20001.2.N 16 AX - 2 modules. Depth: 25 mm			
 20002 20 AX. Depth: 25 mm	 20002.2 20 AX - 2 modules. Depth: 25 mm	 20003 20 AX, 3-gang - 2 modules. Depth: 25 mm	 20002.B 20 AX. Depth: 25 mm	 20002.2.B 20 AX - 2 modules. Depth: 25 mm	 20003.B 20 AX, 3-gang - 2 modules. Depth: 25 mm	 20002.N 20 AX. Depth: 25 mm	 20002.2.N 20 AX - 2 modules. Depth: 25 mm	 20003.N 20 AX, 3-gang - 2 modules. Depth: 25 mm

Axial 1P 1-way switches 250 V~ (lightable°)

 20101 16 AX. Depth: 34,5 mm	 20101.2 16 AX - 2 modules. Depth: 34,5 mm	 20101.B 16 AX. Depth: 34,5 mm	 20101.2.B 16 AX - 2 modules. Depth: 34,5 mm	 20101.N 16 AX. Depth: 34,5 mm	 20101.2.N 16 AX - 2 modules. Depth: 34,5 mm
--	--	---	--	---	--

* Not to be used in European Countries
 ° Lamps and signalling units, page 83

■ Please, contact the commercial network for further information

Grey
White
Next
2P 1-way switches 250 V~ (lightable°)


20015
16 AX.
Depth: 25 mm

20015.2
16 AX.
- 2 modules.
Depth: 25 mm



20015.B
16 AX.
Depth: 25 mm

20015.2.B
16 AX.
- 2 modules.
Depth: 25 mm



20015.N
16 AX.
Depth: 25 mm

20015.2.N
16 AX.
- 2 modules.
Depth: 25 mm



20016
20 AX.
Depth: 26 mm

20016.2
20 AX, ON/OFF.
- 2 modules.
Depth: 26 mm

20016.WH
20 AX,
Water/Heater.
Depth: 26 mm



20016.B
20 AX.
Depth: 26 mm

20016.2.B
20 AX, ON/OFF.
- 2 modules.
Depth: 26 mm

20016.WH.B
20 AX,
Water/Heater.
Depth: 26 mm



20016.N
20 AX.
Depth: 26 mm

20016.2.N
20 AX, ON/OFF.
- 2 modules.
Depth: 26 mm

20016.WH.N
20 AX,
Water/Heater.
Depth: 26 mm



20016.2.WH
20 AX, Water/Heater.
- 2 modules.
Depth: 26 mm



20016.2.WH.B
20 AX, Water/Heater.
- 2 modules.
Depth: 26 mm



20016.2.WH.N
20 AX, Water/Heater.
- 2 modules.
Depth: 26 mm



20017
32 A, 1-gang, ON/OFF.
Depth: 22,5 mm

20017.WH
32 A, 1-gang, Water/Heater.
Depth: 22,5 mm



20017.B
32 A, 1-gang, ON/OFF.
Depth: 22,5 mm

20017.WH.B
32 A, 1-gang, Water/Heater.
Depth: 22,5 mm



20017.N
32 A, 1-gang, ON/OFF.
Depth: 22,5 mm

20017.WH.N
32 A, 1-gang, Water/Heater.
Depth: 22,5 mm



20018
45 A, 1-gang, ON/OFF.
Depth: 22,5 mm

20018.CK
45 A, 1-gang, cooker unit.
Depth: 22,5 mm



20018.B
45 A, 1-gang, ON/OFF.
Depth: 22,5 mm

20018.CK.B
45 A, 1-gang, cooker unit.
Depth: 22,5 mm



20018.N
45 A, 1-gang, ON/OFF.
Depth: 22,5 mm

20018.CK.N
45 A, 1-gang, cooker unit.
Depth: 22,5 mm



20019
45 A, 1-gang, ON/OFF for 2-gang boxes.
Depth: 22,5 mm

20019.CK
45 A, 1-gang, cooker unit for 2-gang boxes.
Depth: 22,5 mm



20019.B
45 A, 1-gang, ON/OFF for 2-gang boxes.
Depth: 22,5 mm

20019.CK.B
45 A, 1-gang, cooker unit for 2-gang boxes.
Depth: 22,5 mm



20019.N
45 A, 1-gang, ON/OFF for 2-gang boxes.
Depth: 22,5 mm

20019.CK.N
45 A, 1-gang, cooker unit for 2-gang boxes.
Depth: 22,5 mm

Devices

Grey	White	Next
------	-------	------

Badge switch (lightable°)



20466
Badge switch.
Depth: 22,1 mm



20466.B
Badge switch.
Depth: 22,1 mm



20466.N
Badge switch.
Depth: 22,1 mm

1P 2-way switches 250 V~ (lightable°)



20005 16 AX.
Depth: 25 mm

20005.2 16 AX.
- 2 modules.
Depth: 25 mm



20005.B 16 AX.
Depth: 25 mm

20005.2.B 16 AX.
- 2 modules.
Depth: 25 mm



20005.N 16 AX.
Depth: 25 mm

20005.2.N 16 AX.
- 2 modules.
Depth: 25 mm



20006 20 AX.
Depth: 25 mm

20006.2 20 AX.
- 2 modules.
Depth: 25 mm



20006.B 20 AX.
Depth: 25 mm

20006.2.B 20 AX.
- 2 modules.
Depth: 25 mm



20006.N 20 AX.
Depth: 25 mm

20006.2.N 20 AX.
- 2 modules.
Depth: 25 mm



20007 20 AX, 3-gang.
- 2 modules.
Depth: 32,6 mm



20007.B 20 AX, 3-gang.
- 2 modules.
Depth: 32,6 mm



20007.N 20 AX, 3-gang.
- 2 modules.
Depth: 32,6 mm

Axial 1P 2-way switches 250 V~ (lightable°)



20105 16 AX.
Depth: 34,5 mm

20105.2 16 AX.
- 2 modules.
Depth: 34,5 mm



20105.B 16 AX.
Depth: 34,5 mm

20105.2.B 16 AX.
- 2 modules.
Depth: 34,5 mm



20105.N 16 AX.
Depth: 34,5 mm

20105.2.N 16 AX.
- 2 modules.
Depth: 34,5 mm

1P reversing switches 250 V~ (lightable°)



20013 16 AX.
Depth: 25 mm

20013.2 16 AX.
- 2 modules.
Depth: 25 mm



20013.B 16 AX.
Depth: 25 mm

20013.2.B 16 AX.
- 2 modules.
Depth: 25 mm



20013.N 16 AX.
Depth: 25 mm

20013.2.N 16 AX.
- 2 modules.
Depth: 25 mm

* Not to be used in European Countries

° Lamps and signalling units, page 83

Devices

Grey	White	Next
------	-------	------

Axial 1P reversing switches 250 V~ (lightable°)



20113
16 AX.
Depth: 34,5 mm

20113.2
16 AX
- 2 modules.
Depth: 34,5 mm



20113.B
16 AX.
Depth: 34,5 mm

20113.2.B
16 AX
- 2 modules.
Depth: 34,5 mm



20113.N
16 AX.
Depth: 34,5 mm

20113.2.N
16 AX
- 2 modules.
Depth: 34,5 mm

1P NO 10 A push buttons 250 V~ (lightable°)



20008
10 A.
Depth: 25 mm

20008.2
10 A
- 2 modules.
Depth: 25 mm



20008.B
10 A.
Depth: 25 mm

20008.2.B
10 A
- 2 modules.
Depth: 25 mm



20008.N
10 A.
Depth: 25 mm

20008.2.N
10 A
- 2 modules.
Depth: 25 mm



20008.2.C
Bell symbol
- 2 modules.
Depth: 25 mm

20008.2.L
Light symbol
- 2 modules.
Depth: 25 mm



20008.2.C.B
Bell symbol
- 2 modules.
Depth: 25 mm

20008.2.L.B
Light symbol
- 2 modules.
Depth: 25 mm



20008.2.C.N
Bell symbol
- 2 modules.
Depth: 25 mm

20008.2.L.N
Light symbol
- 2 modules.
Depth: 25 mm

Axial 1P NO 10 A push buttons 250 V~ (lightable°)



20108
10 A.
Depth: 34,5 mm

20108.2
10 A
- 2 modules.
Depth: 34,5 mm



20108.B
10 A.
Depth: 34,5 mm

20108.2.B
10 A
- 2 modules.
Depth: 34,5 mm



20108.N
10 A.
Depth: 34,5 mm

20108.2.N
10 A
- 2 modules.
Depth: 34,5 mm

1P NC 10 A push button 250 V~ (lightable°)



20010
10 A.
Depth: 25 mm



20010.B
10 A.
Depth: 25 mm



20010.N
10 A.
Depth: 25 mm

Lightable° mechanisms 250 V~ (common devices for the three versions)



20001.0
1P 16 AX
1-way switch.
Depth: 25 mm

20015.0
2P 16 AX
1-way switch.
Depth: 25 mm

20005.0
1P 16 AX
2-way switch.
Depth: 25 mm

20013.0
1P 16 AX
reversing switch.
Depth: 25 mm

20008.0
1P NO 10 A
push button.
Depth: 25 mm

20010.0
1P NC 10 A
push button.
Depth: 25 mm

20002.0
1P 20 AX
1-way switch.
Depth: 25 mm




20016.0
2P 20 AX
1-way switch.
Depth: 25 mm

20006.0
1P 20 AX
2-way switch.
Depth: 25 mm




Devices

Grey	White	Next
------	-------	------





1-module interchangeable buttons (lightable°)

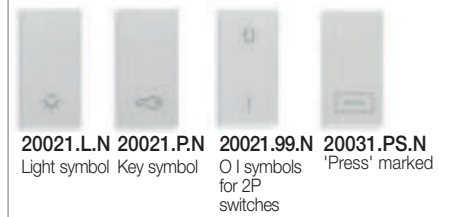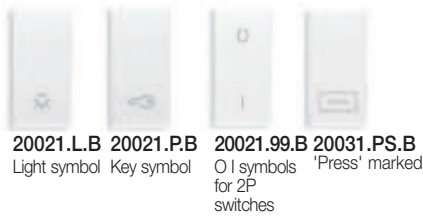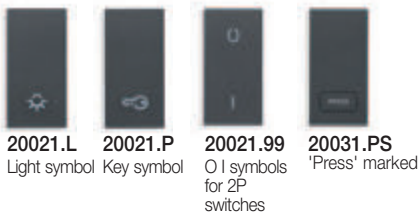

1-module interchangeable buttons for axial controls (lightable°)



2-module interchangeable buttons (lightable°)

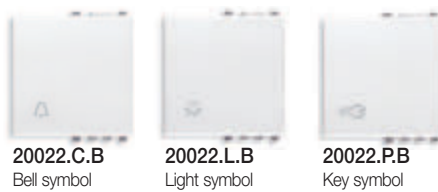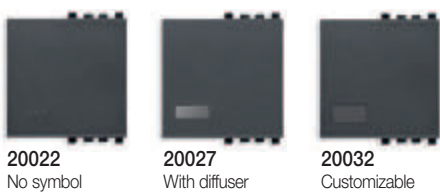
















* Not to be used in European Countries

° Lamps and signalling units, page 83

Devices

Grey	White	Next
------	-------	------










2-module interchangeable buttons for axial controls (lightable°)

 20132 No symbol	 20132.C Bell symbol	 20132.L Light symbol	 20132.B No symbol	 20132.C.B Bell symbol	 20132.L.B Light symbol	 20132.N No symbol	 20132.C.N Bell symbol	 20132.L.N Light symbol
 20132.P Key symbol	 20132.0 Customizable		 20132.P.B Key symbol	 20132.0.B Customizable		 20132.P.N Key symbol	 20132.0.N Customizable	

3-module interchangeable buttons (lightable°)

 20023 No symbol	 20028 With diffuser	 20023.B No symbol	 20028.B With diffuser	 20023.N No symbol	 20028.N With diffuser
 20033 Customizable	 20023.C Bell symbol	 20033.B Customizable	 20023.C.B Bell symbol	 20033.N Customizable	 20023.C.N Bell symbol

1P special switches 250 V~

 20050 NO 10 A, with lightable name-plate - 2 modules. Depth: 26,5 mm	 20052 NO 10 A cord-operated. Depth: 25,5 mm	 20053 NC 10 A cord-operated. Depth: 25,5 mm	 20050.B NO 10 A, with lightable name-plate - 2 modules. Depth: 26,5 mm	 20052.B NO 10 A cord-operated. Depth: 25,5 mm	 20053.B NC 10 A cord-operated. Depth: 25,5 mm	 20050.N NO 10 A, with lightable name-plate - 2 modules. Depth: 26,5 mm	 20052.N NO 10 A cord-operated. Depth: 25,5 mm	 20053.N NC 10 A cord-operated. Depth: 25,5 mm
---	---	---	--	---	---	--	---	---



▲ **20097**
NO 10 A 230 V~, for hotel "Do Not Disturb" and "Please Clean" lightable - 2 modules.
Depth: 29 mm

Additional 1P switches 250 V~

 20056.33 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	 20056.34 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	 20058 Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm	 20056.33.B 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	 20056.34.B 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	 20058.B Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm	 20056.33.N 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	 20056.34.N 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	 20058.N Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm
---	---	---	--	---	---	--	---	---

Devices

Grey	White	Next
------	-------	------

1P push buttons 250 V~



20066
Two NO 10 A,
independents.
Depth: 29,5 mm



20066.B
Two NO 10 A,
independents.
Depth: 29,5 mm



20066.N
Two NO 10 A,
independents.
Depth: 29,5 mm

1P NO 10 A push buttons 250 V~ with indicator (for signalling units°)



20068.B
White diffuser.
Depth: 29 mm



20068.R
Red diffuser.
Depth: 29 mm



20068.B.B
White diffuser.
Depth: 29 mm



20068.R.B
Red diffuser.
Depth: 29 mm



20068.B.N
White diffuser.
Depth: 29 mm



20068.R.N
Red diffuser.
Depth: 29 mm



20068.V
Green diffuser.
Depth: 29 mm



20068.V.B
Green diffuser.
Depth: 29 mm



20068.V.N
Green diffuser.
Depth: 29 mm

Switches 250 V~



20060
2P 10 AX
2-way switch,
OFF-central.
Depth: 34 mm



20062
2 1P NO 10 A
push buttons,
interlocked.
Depth: 29,5 mm



20060.B
2P 10 AX
2-way switch,
OFF-central.
Depth: 34 mm



20062.B
2 1P NO 10 A
push buttons,
interlocked.
Depth: 29,5 mm



20060.N
2P 10 AX
2-way switch,
OFF-central.
Depth: 34 mm



20062.N
2 1P NO 10 A
push buttons,
interlocked.
Depth: 29,5 mm

2P key-operated switches 250 V~ (add .CU to the basic code for switches with 000 unified key)



20082
16 AX 1-way switch,
key removable in
"O" (OFF) position.
Depth: 33,5 mm



20083
16 AX 1-way switch,
key removable in
both positions.
Depth: 33,5 mm



20082.B
16 AX 1-way switch,
key removable in
"O" (OFF) position.
Depth: 33,5 mm



20083.B
16 AX 1-way switch,
key removable in
both positions.
Depth: 33,5 mm



20082.N
16 AX 1-way switch,
key removable in
"O" (OFF) position.
Depth: 33,5 mm



20083.N
16 AX 1-way switch,
key removable in
both positions.
Depth: 33,5 mm



20086
NO 16 A push button,
key removable in "O"
position.
Depth: 33,5 mm



20086.B
NO 16 A push button,
key removable in "O"
position.
Depth: 33,5 mm
























20086.N
NO 16 A push button,
key removable in "O"
position.
Depth: 33,5 mm













Devices

Grey	White	Next
------	-------	------

Dimmers**

 20135 MASTER, universal ▲20135.120 As above, 120 V~. Depth: 41,5 mm	 20136 MASTER, universal, with potentiometer ▲20136.120 As above, 120 V~. Depth: 41,5 mm	 20137 SLAVE, universal ▲20137.120 As above, 120 V~. Depth: 41,5 mm	 20135.B MASTER, universal ▲20135.120.B As above, 120 V~. Depth: 41,5 mm	 20136.B MASTER, universal, with potentiometer ▲20136.120.B As above, 120 V~. Depth: 41,5 mm	 20137.B SLAVE, universal ▲20137.120.B As above, 120 V~. Depth: 41,5 mm	 20135.N MASTER, universal ▲20135.120.N As above, 120 V~. Depth: 41,5 mm	 20136.N MASTER, universal, with potentiometer ▲20136.120.N As above, 120 V~. Depth: 41,5 mm	 20137.N SLAVE, universal ▲20137.120.N As above, 120 V~. Depth: 41,5 mm			
 20138 RGB, with potentiometer ▲20138.120 As above, 120 V~. Depth: 41,5 mm	 20139 FADING-SHOW, with potentiometer ▲20139.120 As above, 120 V~. Depth: 41,5 mm	 20138.B RGB, with potentiometer ▲20138.120.B As above, 120 V~. Depth: 41,5 mm	 20139.B FADING-SHOW, with potentiometer ▲20139.120.B As above, 120 V~. Depth: 41,5 mm	 20138.N RGB, with potentiometer ▲20138.120.N As above, 120 V~. Depth: 41,5 mm	 20139.N FADING-SHOW, with potentiometer ▲20139.120.N As above, 120 V~. Depth: 41,5 mm	 *20148 MASTER, 800 W/500 VA 120-230 V~. Depth: 41,5 mm	 *20149 SLAVE, 800 W/500 VA 120-230 V~. Depth: 41,5 mm	 *20148.B MASTER, 800 W/500 VA 120-230 V~. Depth: 41,5 mm	 *20149.B SLAVE, 800 W/500 VA 120-230 V~. Depth: 41,5 mm	 *20148.N MASTER, 800 W/500 VA 120-230 V~. Depth: 41,5 mm	 *20149.N SLAVE, 800 W/500 VA 120-230 V~. Depth: 41,5 mm












Dimmers (fuse protected for British Standard boxes with depth equal or higher than 35 mm)**

 *20140 MASTER, 700 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers *20142 As above, 500 VA - 2 modules Only for electronic transformers  Depth: 32,5 mm	 *20141 SLAVE, 700 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers *20143 As above, 500 VA - 2 modules Only for electronic transformers  Depth: 32,5 mm	 *20140.B MASTER, 700 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers *20142.B As above, 500 VA - 2 modules Only for electronic transformers  Depth: 32,5 mm	 *20141.B SLAVE, 700 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers *20143.B As above, 500 VA - 2 modules Only for electronic transformers  Depth: 32,5 mm	 *20140.N MASTER, 700 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers *20142.N As above, 500 VA - 2 modules Only for electronic transformers  Depth: 32,5 mm	 *20141.N SLAVE, 700 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers *20143.N As above, 500 VA - 2 modules Only for electronic transformers  Depth: 32,5 mm
--	---	--	---	--	---

Devices

Grey	White	Next
------	-------	------

Dimmers (fuse protected for British Standard boxes with depth equal or higher than 35 mm)**

 20165 MASTER, 500 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers 20167 As above, 400 VA - 2 modules. Only for electronic transformers  Depth: 32,5 mm	 20166 SLAVE, 500 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers 20168 As above, 400 VA - 2 modules. Only for electronic transformers  Depth: 32,5 mm	 20165.B MASTER, 500 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers 20167.B As above, 400 VA - 2 modules. Only for electronic transformers  Depth: 32,5 mm	 20166.B SLAVE, 500 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers 20168.B As above, 400 VA - 2 modules. Only for electronic transformers  Depth: 32,5 mm	 20165.N MASTER, 500 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers 20167.N As above, 400 VA - 2 modules. Only for electronic transformers  Depth: 32,5 mm	 20166.N SLAVE, 500 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers 20168.N As above, 400 VA - 2 modules. Only for electronic transformers  Depth: 32,5 mm
--	---	--	---	--	---




Electronic transformers (230-240 V~ 50/60 Hz)

 01860.60 20-60 W, 12 V~ (SELV) output	 01860.105 20-105 W, 12 V~ (SELV) output
---	--










Bleeder

 01873 230 V~ 50 Hz, flush mounting (rear side) ▲01873.120 As above, 120 V~







Electronic supply unit

 01874 230 V~ 50 Hz, for controllable LED lamps, 12-24 Vdc ▲01874.120 As above, 120 V~	 01875 230 V~ 50 Hz, for controllable LED lamps, 350/500/700 mA ▲01875.120 As above, 120 V~	 01876 230 V~ 50 Hz, for controllable LED RGB lamps, 12-24 Vdc ▲01876.120 As above, 120 V~
---	---	---

Touch switches (230 V~ with built-in touch sensor)

 20120 Electronic switch, NO 6 A relay. Depth: 37 mm	 20125 Dimmer, 40-500 W/VA, MASTER. Depth: 41,5 mm	 20123 Push button for remote control, 50/60 Hz. Depth: 37 mm	 20120.B Electronic switch, NO 6 A relay. Depth: 37 mm	 20125.B Dimmer, 40-500 W/VA, MASTER. Depth: 41,5 mm	 20123.B Push button for remote control, 50/60 Hz. Depth: 37 mm	 20120.N Electronic switch, NO 6 A relay. Depth: 37 mm	 20125.N Dimmer, 40-500 W/VA, MASTER. Depth: 41,5 mm	 20123.N Push button for remote control, 50/60 Hz. Depth: 37 mm
---	--	---	--	--	---	--	--	---

Infrared switches

 20172 Receiver, NO 6 A 230 V~ relay output, 50/60 Hz 20172.120 As above, 120 V~. Depth: 37 mm	 20173 Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 37 mm	 20172.B Receiver, NO 6 A 230 V~ relay output, 50/60 Hz 20172.120.B As above, 120 V~. Depth: 37 mm	 20173.B Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 37 mm	 20172.N Receiver, NO 6 A 230 V~ relay output, 50/60 Hz 20172.120.N As above, 120 V~. Depth: 37 mm	 20173.N Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 37 mm
---	--	--	--	--	--

* Not to be used in European Countries
 ° Lamps and signalling units, page 83

** Please refer to instruction sheets for load type
 ▲ New article

Devices • Socket outlets

Grey	White	Next
------	-------	------

Infrared switches



20175
Receiver,
40-450 W/VA
dimmer, 230 V~.
Depth: 41,5 mm



20175.B
Receiver,
40-450 W/VA
dimmer, 230 V~.
Depth: 41,5 mm



20175.N
Receiver,
40-450 W/VA
dimmer, 230 V~.
Depth: 41,5 mm



01849
IR remote control, 14-channel



20181
Lighting switch,
NO 6 A 230 V~
relay output,
50/60 Hz
20181.120
As above,
120 V~.
Depth: 37 mm



20184
For incandescent
lamps,
60-300 W,
230 V~
50/60 Hz.
Depth: 37 mm



00801.14
Orientable
support
- 1 module



20181.B
Lighting switch,
NO 6 A 230 V~
relay output,
50/60 Hz
20181.120.B
As above,
120 V~.
Depth: 37 mm



20184.B
For incandescent
lamps,
60-300 W,
230 V~
50/60 Hz.
Depth: 37 mm



00801
Orientable
support
- 1 module



20181.N
Lighting switch,
NO 6 A 230 V~
relay output,
50/60 Hz
20181.120.N
As above,
120 V~.
Depth: 37 mm



20184.N
For incandescent
lamps,
60-300 W,
230 V~
50/60 Hz.
Depth: 37 mm



00801.20
Orientable
support
- 1 module

Set/Reset push buttons



20183
For emergency call, 2 NO 5 A 250 V~,
12 V~/12-24 Vdc (SELV) - 2 modules.
Depth: 38,5 mm



20183.B
For emergency call, 2 NO 5 A 250 V~,
12 V~/12-24 Vdc (SELV) - 2 modules.
Depth: 38,5 mm



20183.N
For emergency call, 2 NO 5 A 250 V~,
12 V~/12-24 Vdc (SELV) - 2 modules.
Depth: 38,5 mm

SICURY 2P+E Italian standard socket outlets 250 V~



20201
10 A, P11.
Depth: 25 mm



20203
Bpresa 16 A,
P17/11.
Depth: 25 mm



20201.B
10 A, P11.
Depth: 25 mm



20203.B
Bpresa 16 A,
P17/11.
Depth: 25 mm




20201.N
10 A, P11.
Depth: 25 mm



20203.N
Bpresa 16 A,
P17/11.
Depth: 25 mm




20209
16 A, P30
- 2 modules.
Depth: 29,4 mm



20210
16 A, universal
- 2 modules.
Depth: 26 mm




20209.B
16 A, P30
- 2 modules.
Depth: 29,4 mm



20210.B
16 A, universal
- 2 modules.
Depth: 26 mm



20209.N
16 A, P30
- 2 modules.
Depth: 29,4 mm



20210.N
16 A, universal
- 2 modules.
Depth: 26 mm

Socket outlets

Grey	White	Next
------	-------	------

SICURY 2P+E interlocked socket outlets with CB and RCBO $I_{\Delta n}$ 10 mA, (120-230 V~ 50/60 Hz)



20273
Bpresa 16 A P17/11 250 V~,
1P+N C 16 - 2 modules.
Depth: 39,7 mm



20273.B
Bpresa 16 A P17/11 250 V~,
1P+N C 16 - 2 modules.
Depth: 39,7 mm



20273.N
Bpresa 16 A P17/11 250 V~,
1P+N C 16 - 2 modules.
Depth: 39,7 mm



20276
16 A P30 250 V~,
1P+N C 16 - 3 modules.
Depth: 39,8 mm



20283
Bpresa 16 A P17/11 250 V~,
1P+N C 16 - 3 modules.
Depth: 39,7 mm



20276.B
16 A P30 250 V~,
1P+N C 16 - 3 modules.
Depth: 39,8 mm



20283.B
Bpresa 16 A P17/11 250 V~,
1P+N C 16 - 3 modules.
Depth: 39,7 mm



20276.N
16 A P30 250 V~,
1P+N C 16 - 3 modules.
Depth: 39,8 mm



20283.N
Bpresa 16 A P17/11 250 V~,
1P+N C 16 - 3 modules.
Depth: 39,7 mm



20286
16 A P30 250 V~, 1P+N C 16
- 4 modules. Depth: 39,8 mm



20286.B
16 A P30 250 V~, 1P+N C 16
- 4 modules. Depth: 39,8 mm



20286.N
16 A P30 250 V~, 1P+N C 16
- 4 modules. Depth: 39,8 mm

Shaver supply units



20290
230 V~ 50/60 Hz, with 20 VA isolating
transformer, 230 V~ and 120 V~ outputs
- 3 modules. Depth: 42 mm



20290.B
230 V~ 50/60 Hz, with 20 VA isolating
transformer, 230 V~ and 120 V~ outputs
- 3 modules. Depth: 42 mm



20290.N
230 V~ 50/60 Hz, with 20 VA isolating
transformer, 230 V~ and 120 V~ outputs
- 3 modules. Depth: 42 mm



20291⁶
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm



20291.B⁶
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm



20291.N⁶
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm

SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)



20203.R
Bpresa 16 A,
P17/11, red.
Depth: 25 mm



20209.A
16 A, P30, orange
- 2 modules.
Depth: 29,4 mm



20209.R
16 A, P30, red
- 2 modules.
Depth: 29,4 mm



20209.V
16 A, P30, green
- 2 modules.
Depth: 29,4 mm



20210.R
16 A, universal, red
- 2 modules.
Depth: 29,4 mm







Socket outlets

Grey		White		Next				
Socket outlets 250 V~ - German standard								
20208 SICURY 2P+E 16 A, German - 2 modules. Depth: 29,4 mm	20208.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 31,2 mm	20208.B SICURY 2P+E 16 A, German - 2 modules. Depth: 29,4 mm	20208.C.B SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 31,2 mm	20208.N SICURY 2P+E 16 A, German - 2 modules. Depth: 29,4 mm	20208.C.N SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 31,2 mm			
Socket outlets 250 V~ - French standard								
20212 SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	20212.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm	20212.B SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	20212.C.B SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm	20212.N SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	20212.C.N SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm			
Socket outlets 250 V~ - English standard								
20214 SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	20219⁴ 2P+E 13 A, English - 2 modules. Depth: 17 mm	20220 SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm	20214.B SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	20219.B⁴ 2P+E 13 A, English - 2 modules. Depth: 17 mm	20220.B SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm	20214.N SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	20219.N⁴ 2P+E 13 A, English - 2 modules. Depth: 17 mm	20220.N SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm
Socket outlets 250 V~ - Swiss standard								
20226 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm	20226.B 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm	20226.N 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm						
Socket outlets 250 V~ - Euro-American standard								
20234 SICURY 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	20248 SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	20234.B SICURY 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	20248.B SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	20234.N SICURY 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	20248.N SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm			
20249 Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm	20249.B Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm	20249.N Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm						




Socket outlets

Grey	White	Next
------	-------	------




Socket outlets 127 V~ - USA and Saudi Arabian standards

 20242 SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm	 20243 Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm	 20242.B SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm	 20243.B Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm	 20242.N SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm	 20243.N Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm
--	---	---	---	---	---

Socket outlets 250 V~ - Israeli standard

 20240 SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm	 20240.B SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm	 20240.N SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm
--	---	---

Socket outlets 250 V~ - Argentinian standard

 20250 SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm	 20250.B SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm	 20250.N SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm
---	--	--


Socket outlets 250 V~ - Chinese standard

 ▲20251 SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm	 ▲20251.B SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm	 ▲20251.N SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm
---	--	--

Socket outlets 250 V~ - Brazilian standard

 20264 SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm	 20265 SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm	 20264.B SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm	 20265.B SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm	 20264.N SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm	 20265.N SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm
--	---	---	---	---	---

Socket outlets 250 V~ - Multistandard

 20257 SICURY 2P+T 10 A, multistandard - 2 modules. Depth: 18,7 mm	 20257.B SICURY 2P+T 10 A, multistandard - 2 modules. Depth: 18,7 mm	 20257.N SICURY 2P+T 10 A, multistandard - 2 modules. Depth: 18,7 mm
--	---	---

Socket outlets • Signal reception socket outlets

Grey	White	Next
------	-------	------


Socket outlets 125 V~ - 2P+E 15 A 60 Hz American standard



▲21296
Double American standard with GFCI
- 3 modules. Depth: 33,4 mm



▲21296.B
Double American standard with GFCI
- 3 modules. Depth: 33,4 mm



▲21296.N
Double American standard with GFCI
- 3 modules. Depth: 33,4 mm

British standard socket outlets 250 V~ (with signalling unit 00930 included)



20221.L⁴
SICURY 2P+E 13 A,
1-gang, switched.
Depth: 17,5 mm



20222.L⁴
SICURY 2P+E 13 A, 2-gang,
switched. Depth: 17,5 mm



20221.L.B⁴
SICURY 2P+E 13 A,
1-gang, switched.
Depth: 17,5 mm



20222.L.B⁴
SICURY 2P+E 13 A, 2-gang,
switched. Depth: 17,5 mm



20221.L.N⁴
SICURY 2P+E 13 A,
1-gang, switched.
Depth: 17,5 mm



20222.L.N⁴
SICURY 2P+E 13 A, 2-gang,
switched. Depth: 17,5 mm



20215.L⁵
SICURY 2P+E 5 A,
1-gang, switched.
Depth: 17,5 mm



20217.L⁵
SICURY 2P+E 15 A,
1-gang, switched.
Depth: 25,5 mm



20215.L.B⁵
SICURY 2P+E 5 A,
1-gang, switched.
Depth: 17,5 mm



20217.L.B⁵
SICURY 2P+E 15 A,
1-gang, switched.
Depth: 25,5 mm



20215.L.N⁵
SICURY 2P+E 5 A,
1-gang, switched.
Depth: 17,5 mm



20217.L.N⁵
SICURY 2P+E 15 A,
1-gang, switched.
Depth: 25,5 mm

Special socket outlets



20331
2P 6 A 24 V
(SELV), for plug
01616/01617.
Depth: 25 mm



20333
5P DIN 41524
socket
connector.
Depth: 11 mm



20334
2P point-line
60130-9 IEC-07
socket connector.
Depth: 11 mm



20331.B
2P 6 A 24 V
(SELV), for plug
01616/01617.
Depth: 25 mm



20333.B
5P DIN 41524
socket
connector.
Depth: 11 mm



20334.B
2P point-line
60130-9 IEC-07
socket connector.
Depth: 11 mm



20331.N
2P 6 A 24 V
(SELV), for plug
01616/01617.
Depth: 25 mm



20333.N
5P DIN 41524
socket
connector.
Depth: 11 mm



20334.N
2P point-line
60130-9 IEC-07
socket connector.
Depth: 11 mm



20345
USB outlet,
screw
terminals.
Depth: 31,9 mm



20293
5 V 1 A supply unit,
2 USB, 100-230 V~
50/60 Hz - 2 modules.
Depth: 37 mm



20335
3 RCA outlets,
screw
terminals.
Depth: 23,4 mm



20345.B
USB outlet,
screw
terminals.
Depth: 31,9 mm



20293.B
5 V 1 A supply unit,
2 USB, 100-230 V~
50/60 Hz - 2 modules.
Depth: 37 mm



20335.B
3 RCA outlets,
screw
terminals.
Depth: 23,4 mm




20345.N
USB outlet,
screw
terminals.
Depth: 31,9 mm



20293.N
5 V 1 A supply unit,
2 USB, 100-230 V~
50/60 Hz - 2 modules.
Depth: 37 mm



20335.N
3 RCA outlets,
screw
terminals.
Depth: 23,4 mm



20346
HDMI outlet,
Keystone connection.
Depth: 24,4 mm



▲20348
VGA, 15-pin.
Depth: 11 mm



20346.B
HDMI outlet,
Keystone connection.
Depth: 24,4 mm



▲20348.B
VGA, 15-pin.
Depth: 11 mm



20346.N
HDMI outlet,
Keystone connection.
Depth: 24,4 mm





▲20348.N
VGA, 15-pin.
Depth: 11 mm

Signal reception socket outlets

Grey	White	Next
------	-------	------

Phone jacks

 20320 RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm	 20321 RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm	 20324 Israeli standard, screw terminals. Depth: 33,4 mm	 20320.B RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm	 20321.B RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm	 20324.B Israeli standard, screw terminals. Depth: 33,4 mm	 20320.N RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm	 20321.N RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm	 20324.N Israeli standard, screw terminals. Depth: 33,4 mm			
 20327 8-contact, French standard - 2 modules. Depth: 22 mm			 20327.B 8-contact, French standard - 2 modules. Depth: 22 mm			 20327.N 8-contact, French standard - 2 modules. Depth: 22 mm					
 20322 RJ11, 6-position, 4-contact (6/4) + cover. Depth: 33,4 mm	 20323 RJ12, 6-position, 6-contact (6/6) + cover. Depth: 33,4 mm	 20325^B BT, MASTER. Depth: 33,4 mm	 20326^B BT, SLAVE. Depth: 33,4 mm	 20322.B RJ11, 6-position, 4-contact (6/4) + cover. Depth: 33,4 mm	 20323.B RJ12, 6-position, 6-contact (6/6) + cover. Depth: 33,4 mm	 20325.B^T BT, MASTER. Depth: 33,4 mm	 20326.B^T BT, SLAVE. Depth: 33,4 mm	 20322.N RJ11, 6-position, 4-contact (6/4) + cover. Depth: 33,4 mm	 20323.N RJ12, 6-position, 6-contact (6/6) + cover. Depth: 33,4 mm	 20325.N^B BT, MASTER. Depth: 33,4 mm	 20326.N^B BT, SLAVE. Depth: 33,4 mm




EDP RJ45 socket connectors

 20337.6 Cat. 6, UTP, shuttered. Depth: 26,1 mm	 20338.1 AT&T/Lucent T./Avaya, Cat. 5e, UTP. Depth: 22,3 mm	 20338.3 AMP/Tyco, Cat. 5e, UTP. Depth: 22,7 mm	 20338.4 AMP/Tyco, Cat. 5e, FTP. Depth: 32,1 mm	 20337.6.B Cat. 6, UTP, shuttered. Depth: 26,1 mm	 20338.1.B AT&T/Lucent T./Avaya, Cat. 5e, UTP. Depth: 22,3 mm	 20338.3.B AMP/Tyco, Cat. 5e, UTP. Depth: 22,7 mm	 20338.4.B AMP/Tyco, Cat. 5e, FTP. Depth: 32,1 mm	 20337.6.N Cat. 6, UTP, shuttered. Depth: 26,1 mm	 20338.1.N AT&T/Lucent T./Avaya, Cat. 5e, UTP. Depth: 22,3 mm	 20338.3.N AMP/Tyco, Cat. 5e, UTP. Depth: 22,7 mm	 20338.4.N AMP/Tyco, Cat. 5e, FTP. Depth: 32,1 mm
 20338.8 Netsafe, Cat. 5e, UTP. Depth: 23,6 mm	 20339.4 Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm	 20339.5 Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm	 20339.6 Netsafe, Cat. 6, UTP 110. Depth: 22,3 mm	 20338.8.B Netsafe, Cat. 5e, UTP. Depth: 23,6 mm	 20339.4.B Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm	 20339.5.B Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm	 20339.6.B Netsafe, Cat. 6, UTP 110. Depth: 22,3 mm	 20338.8.N Netsafe, Cat. 5e, UTP. Depth: 23,6 mm	 20339.4.N Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm	 20339.5.N Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm	 20339.6.N Netsafe, Cat. 6, UTP 110. Depth: 22,3 mm
 20339.11 Netsafe, Cat. 5e, UTP. Depth: 30,3 mm	 20339.13 Netsafe, Cat. 6, UTP. Depth: 30,3 mm	 20339.14 Netsafe, Cat. 6, FTP. Depth: 30,3 mm	 20339.11.B Netsafe, Cat. 5e, UTP. Depth: 30,3 mm	 20339.13.B Netsafe, Cat. 6, UTP. Depth: 30,3 mm	 20339.14.B Netsafe, Cat. 6, FTP. Depth: 30,3 mm	 20339.11.N Netsafe, Cat. 5e, UTP. Depth: 30,3 mm	 20339.13.N Netsafe, Cat. 6, UTP. Depth: 30,3 mm	 20339.14.N Netsafe, Cat. 6, FTP. Depth: 30,3 mm			




Signal reception socket outlets

Grey	White	Next
------	-------	------




EDP RJ45 socket connectors

 <p>20339.16 Netsafe, Cat. 6A, FTP. Depth: 30,3 mm</p> <p>20340.1 Panduit, Cat. 5e, UTP. Depth: 28,55 mm</p> <p>20340.2 Panduit, Cat. 5e, FTP. Depth: 29,05 mm</p>	 <p>20339.16.B Netsafe, Cat. 6A, FTP. Depth: 30,3 mm</p> <p>20340.1.B Panduit, Cat. 5e, UTP. Depth: 28,55 mm</p> <p>20340.2.B Panduit, Cat. 5e, FTP. Depth: 29,05 mm</p>	 <p>20339.16.N Netsafe, Cat. 6A, FTP. Depth: 30,3 mm</p> <p>20340.1.N Panduit, Cat. 5e, UTP. Depth: 28,55 mm</p> <p>20340.2.N Panduit, Cat. 5e, FTP. Depth: 29,05 mm</p>
---	--	--

EDP socket connectors

 <p>20361 BNC, coaxial cable soldering. Depth: 11 mm</p> <p>20365 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm</p>	 <p>20361.B BNC, coaxial cable soldering. Depth: 11 mm</p> <p>20365.B 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm</p>	 <p>20361.N BNC, coaxial cable soldering. Depth: 11 mm</p> <p>20365.N 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm</p>
---	--	--




Adaptors for EDP connectors

 <p>20338.C RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 m</p> <p>20340.C For MINI-COM Panduit. Depth: 11 mm</p> <p>20341.C For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 11 mm</p>	 <p>20338.C.B RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 m</p> <p>20340.C.B For MINI-COM Panduit. Depth: 11 mm</p> <p>20341.C.B For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 11 mm</p>	 <p>20338.C.N RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 m</p> <p>20340.C.N For MINI-COM Panduit. Depth: 11 mm</p> <p>20341.C.N For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 11 mm</p>
--	---	---

Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output male and female)

 <p>20300.01 Single connection, 1 dB. Depth: 26,8 mm</p> <p>20300.10 Through-line, 10 dB. Depth: 26,8 mm</p>	 <p>20300.01.B Single connection, 1 dB. Depth: 26,8 mm</p> <p>20300.10.B Through-line, 10 dB. Depth: 26,8 mm</p>	 <p>20300.01.N Single connection, 1 dB. Depth: 26,8 mm</p> <p>20300.10.N Through-line, 10 dB. Depth: 26,8 mm</p>
--	---	---

Coaxial TV-RD-SAT 5-2400 MHz socket outlets, demix (male and F-type outputs)

 <p>20302.01 Single connection 1 dB - 2 modules. Depth: 22,4 mm</p> <p>20302.10 Through-line 10 dB - 2 modules. Depth: 22,4 mm</p>	 <p>20302.01.B Single connection 1 dB - 2 modules. Depth: 22,4 mm</p> <p>20302.10.B Through-line 10 dB - 2 modules. Depth: 22,4 mm</p>	 <p>20302.01.N Single connection 1 dB - 2 modules. Depth: 22,4 mm</p> <p>20302.10.N Through-line 10 dB - 2 modules. Depth: 22,4 mm</p>
--	---	---




Signal reception socket outlets • Signalling

Grey	White	Next
------	-------	------

Coaxial TV-FM-SAT 5-2400 MHz socket outlets (male, female and F-type outputs)

 20303 Single connection 1 dB - 2 modules. Depth: 20,5 mm	 20303.B Single connection 1 dB - 2 modules. Depth: 20,5 mm	 20303.N Single connection 1 dB - 2 modules. Depth: 20,5 mm
---	--	--







F-type socket outlets

 20318 With F type female connector. Depth: 11 mm	 20318.B With F type female connector. Depth: 11 mm	 20318.N With F type female connector. Depth: 11 mm
---	--	--










Adaptors for coaxial TV-RD-SAT socket outlets

 20319 For 2 or 3 outputs - 2 modules	 20319.B For 2 or 3 outputs - 2 modules	 20319.N For 2 or 3 outputs - 2 modules
--	---	---




Terminal resistor and coaxial TV-RD-SAT 2400 MHz connectors

 16330 Z 75 Ω, for frequencies up to 2400 MHz	 01644 Male, axial cable entry	 01645 Female, axial cable entry	 01634 Male, 90°-cable entry	 01635 Female, 90°-cable entry	 01654 Male F-type, for RG59 cable
--	--	--	--	--	--

Electromechanical bells

 20370 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	 20372 120 V~ 50/60 Hz. Depth: 37 mm	 20373 230 V~ 50/60 Hz. Depth: 37 mm	 20370.B 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	 20372.B 120 V~ 50/60 Hz. Depth: 37 mm	 20373.B 230 V~ 50/60 Hz. Depth: 37 mm	 20370.N 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	 20372.N 120 V~ 50/60 Hz. Depth: 37 mm	 20373.N 230 V~ 50/60 Hz. Depth: 37 mm
---	--	--	--	--	--	--	--	--

Electronic bells







 20380 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm	 20380.B 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm	 20380.N 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm
---	--	--

* Not to be used in European Countries

° Lamps and signalling units, page 83

Grey	White	Next
------	-------	------












Buzzers

 <p>20375 12 V~ (SELV) 50/60 Hz. Depth: 37 mm</p>  <p>20377 120 V~ 50/60 Hz. Depth: 37 mm</p>  <p>20378 230 V~ 50/60 Hz. Depth: 37 mm</p>	 <p>20375.B 12 V~ (SELV) 50/60 Hz. Depth: 37 mm</p>  <p>20377.B 120 V~ 50/60 Hz. Depth: 37 mm</p>  <p>20378.B 230 V~ 50/60 Hz. Depth: 37 mm</p>	 <p>20375.N 12 V~ (SELV) 50/60 Hz. Depth: 37 mm</p>  <p>20377.N 120 V~ 50/60 Hz. Depth: 37 mm</p>  <p>20378.N 230 V~ 50/60 Hz. Depth: 37 mm</p>
--	---	---





Luminous indicator units (for signalling units^o)

 <p>20386.A Orange diffuser. Depth: 23 mm</p>  <p>20386.B White diffuser. Depth: 23 mm</p>	 <p>20386.A.B Orange diffuser. Depth: 23 mm</p>  <p>20386.B.B White diffuser. Depth: 23 mm</p>	 <p>20386.A.N Orange diffuser. Depth: 23 mm</p>  <p>20386.B.N White diffuser. Depth: 23 mm</p>
 <p>20386.R Red diffuser. Depth: 23 mm</p>  <p>20386.V Green diffuser. Depth: 23 mm</p>	 <p>20386.R.B Red diffuser. Depth: 23 mm</p>  <p>20386.V.B Green diffuser. Depth: 23 mm</p>	 <p>20386.R.N Red diffuser. Depth: 23 mm</p>  <p>20386.V.N Green diffuser. Depth: 23 mm</p>

Double indicator units (for 2 signalling units^o)

 <p>20388.AB Orange and white diffusers. Depth: 23 mm</p>  <p>20388.AV Orange and green diffusers. Depth: 23 mm</p>	 <p>20388.AB.B Orange and white diffusers. Depth: 23 mm</p>  <p>20388.AV.B Orange and green diffusers. Depth: 23 mm</p>	 <p>20388.AB.N Orange and white diffusers. Depth: 23 mm</p>  <p>20388.AV.N Orange and green diffusers. Depth: 23 mm</p>
 <p>20388.BR White and red diffusers. Depth: 23 mm</p>  <p>20388.RV Red and green diffusers. Depth: 23 mm</p>	 <p>20388.BR.B White and red diffusers. Depth: 23 mm</p>  <p>20388.RV.B Red and green diffusers. Depth: 23 mm</p>	 <p>20388.BR.N White and red diffusers. Depth: 23 mm</p>  <p>20388.RV.N Red and green diffusers. Depth: 23 mm</p>

Prismatic indicator units - 2 modules (for 14770, 14771, 14776 and 14777 lamps - supplied without lamp)

 <p>20387.A Orange diffuser. Depth: 25 mm</p>	 <p>20387.B White diffuser. Depth: 25 mm</p>	 <p>20387.R Red diffuser. Depth: 25 mm</p>	 <p>20387.V Green diffuser. Depth: 25 mm</p>
--	--	--	--

Grey	White	Next
------	-------	------

Step marker lamps (with high-efficiency LED)



20381
230 V~ 50/60 Hz
20381.012
12 V~ 50/60 Hz or
12 Vdc (SELV).
Depth: 37 mm



20389
230 V~ 50/60 Hz
- 2 modules
20389.120
As above, 120 V~.
Depth: 37 mm



20381.B
230 V~ 50/60 Hz
20381.012.B
12 V~ 50/60 Hz or
12 Vdc (SELV).
Depth: 37 mm



20389.B
230 V~ 50/60 Hz
- 2 modules
20389.120.B
As above, 120 V~.
Depth: 37 mm



20381.N
230 V~ 50/60 Hz
20381.012.N
12 V~ 50/60 Hz or
12 Vdc (SELV).
Depth: 37 mm



20389.N
230 V~ 50/60 Hz
- 2 modules
20389.120.N
As above, 120 V~.
Depth: 37 mm



20389.012
12 V~ 50/60 Hz
or 12 Vdc (SELV)
- 2 modules.
Depth: 37 mm



20389.012.B
12 V~ 50/60 Hz
or 12 Vdc (SELV)
- 2 modules.
Depth: 37 mm



20389.012.N
12 V~ 50/60 Hz
or 12 Vdc (SELV)
- 2 modules.
Depth: 37 mm

Lighting devices



20383
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



20383.B
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



20383.N
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



02671
With high-efficiency LED, 120-230 V~ 50/60 Hz
and built-in 7-module frame.
Depth: 44,7 mm

TORCIA, electronic hand-lamps (with automatic emergency device)



20395
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20396
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20395.B
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20396.B
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm









20395.N
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20396.N
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm

Grey	White	Next
------	-------	------





Emergency lighting devices (with automatic emergency device)

 20382 With high-efficiency LED, 230 V~ 50/60 Hz. Depth: 37 mm	 20382.B With high-efficiency LED, 230 V~ 50/60 Hz. Depth: 37 mm	 20382.N With high-efficiency LED, 230 V~ 50/60 Hz. Depth: 37 mm
 20384 With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules. Depth: 37 mm	 20384.B With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules. Depth: 37 mm	 20384.N With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules. Depth: 37 mm

Emergency lighting devices

 02661 With high-efficiency LED, 230 V~ 50/60 Hz, rechargeable Ni-Cd battery and built-in 7-module frame 02661.120 As above 120 V~ 50/60 Hz. Depth: 44,7 mm	 20394 230 V~ 50/60 Hz, Ni-Cd battery, with FD 4W G5 lamp and built-in 7-module frame. Depth: 47,1 mm	 02662 LED, controllable, 230 V~ 50 Hz - 3 modules ▲02662.120 As above, 120 V~. Depth: 39 mm	 02663 LED RGB, controllable, 230 V~ 50 Hz - 3 modules ▲02663.120 As above, 120 V~. Depth: 39 mm
---	--	--	---

Rechargeable batteries

 ▲00908 3 x Ni-MH 1,2 V 800 mAh, HR03 (AAA)	 00910 Ni-MH 4,8 V 80 mAh battery, spare part for TORCIA	 00911.1 Ni-Cd 2,4 V 1,3 Ah battery, spare part for emergency lighting devices (20394)	 00913 Ni-Cd 4,8 V 800 mAh spare rechargeable battery for 02661 and 02661.120
--	--	--	--

Protection devices










 20416 1P 16 A 250 V~ fuse carrier. Depth: 29 mm	 20417 230 V~ SPD transient voltage suppressor. Depth: 29 mm	 20416.B 1P 16 A 250 V~ fuse carrier. Depth: 29 mm	 20417.B 230 V~ SPD transient voltage suppressor. Depth: 29 mm	 20416.N 1P 16 A 250 V~ fuse carrier. Depth: 29 mm	 20417.N 230 V~ SPD transient voltage suppressor. Depth: 29 mm
---	--	--	--	--	--

 20417.R Spare part for 20417

Protection • Detection

Grey	White	Next
------	-------	------










1P+N circuit breakers (120-230 V~ 50/60 Hz)

 20405.06 C 6, breaking capacity 1500 A. Depth: 39 mm	 20405.10 C 10, breaking capacity 3000 A. Depth: 39 mm	 20405.16 C 16, breaking capacity 3000 A. Depth: 39 mm	 20405.06.B C 6, breaking capacity 1500 A. Depth: 39 mm	 20405.10.B C 10, breaking capacity 3000 A. Depth: 39 mm	 20405.16.B C 16, breaking capacity 3000 A. Depth: 39 mm	 20405.06.N C 6, breaking capacity 1500 A. Depth: 39 mm	 20405.10.N C 10, breaking capacity 3000 A. Depth: 39 mm	 20405.16.N C 16, breaking capacity 3000 A. Depth: 39 mm
---	---	---	--	---	---	--	---	---

1P+N residual current breakers with overcurrent protection (RCBO) (120-230 V~ 50/60 Hz)

 20411.06 C 6, $I_{\Delta n}$ 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 20411.10 C 10, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.06.B C 6, $I_{\Delta n}$ 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 20411.10.B C 10, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.06.N C 6, $I_{\Delta n}$ 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 20411.10.N C 10, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm
 20411.16 C 16, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.6 C 16, $I_{\Delta n}$ 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.B C 16, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.6.B C 16, $I_{\Delta n}$ 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.N C 16, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.6.N C 16, $I_{\Delta n}$ 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm

Detectors (230 V~ 50/60 Hz)

 20420 Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 37 mm	 20421 Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 37 mm	 20420.B Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 37 mm	 20421.B Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 37 mm	 20420.N Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 37 mm	 20421.N Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 37 mm
 20422 CO Stop, carbone monoxide detector, 6 A 230 V~ change-over relay output - 3 modules. Depth: 37 mm	 20422.B CO Stop, carbone monoxide detector, 6 A 230 V~ change-over relay output - 3 modules. Depth: 37 mm	 20422.N CO Stop, carbone monoxide detector, 6 A 230 V~ change-over relay output - 3 modules. Depth: 37 mm			









16590
3/4" NO manually resettable solenoid valve









01899
Gas test cylinder for testing Gas Stop Metano and GPL detectors

Grey	White	Next
------	-------	------







Switches for fan-coil regulation

 <p>20095 Slide, 1P 6(2) A 250 V~, 4-position. Depth: 40 mm</p>	 <p>20096 Rotary, 1P 6(3) A 250 V~, 4-position - 2 modules. Depth: 37 mm</p>	 <p>20095.B Slide, 1P 6(2) A 250 V~, 4-position. Depth: 40 mm</p>	 <p>20096.B Rotary, 1P 6(3) A 250 V~, 4-position - 2 modules. Depth: 37 mm</p>	 <p>20095.N Slide, 1P 6(2) A 250 V~, 4-position. Depth: 40 mm</p>	 <p>20096.N Rotary, 1P 6(3) A 250 V~, 4-position - 2 modules. Depth: 37 mm</p>
--	--	---	--	---	--







Electronic thermostats (heating and air-conditioning, 120-230 V~ 50/60 Hz)

 <p>20440 For residential sector, 6(2) A 230 V~ change-over relay output - 2 modules. Depth: 37 mm</p>	 <p>20441 For tertiary sector, 6(2) A 230 V~ change-over relay output - 2 modules. Depth: 37 mm</p>	 <p>20440.B For residential sector, 6(2) A 230 V~ change-over relay output - 2 modules. Depth: 37 mm</p>	 <p>20441.B For tertiary sector, 6(2) A 230 V~ change-over relay output - 2 modules. Depth: 37 mm</p>	 <p>20440.N For residential sector, 6(2) A 230 V~ change-over relay output - 2 modules. Depth: 37 mm</p>	 <p>20441.N For tertiary sector, 6(2) A 230 V~ change-over relay output - 2 modules. Depth: 37 mm</p>
---	---	--	---	--	---

Electronic timer-thermostats (heating and air-conditioning)

 <p>20445 6(2) A 230 V~ change-over relay output, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm</p>	 <p>20446 5(2) A 250 V~ change-over relay output, AA LR6 1,5 V battery (supplied) - 3 modules. Depth: 43 mm</p>	 <p>20445.B 6(2) A 230 V~ change-over relay output, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm</p>	 <p>20446.B 5(2) A 250 V~ change-over relay output, AA LR6 1,5 V battery (supplied) - 3 modules. Depth: 43 mm</p>	 <p>20445.N 6(2) A 230 V~ change-over relay output, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm</p>	 <p>20446.N 5(2) A 250 V~ change-over relay output, AA LR6 1,5 V battery (supplied) - 3 modules. Depth: 43 mm</p>
--	---	---	---	---	---

Clocks (120-230 V~ 50/60 Hz)

 <p>20448 24h/7day timer-switch, 1-canal, 8 A 230 V~ change-over relay output - 2 modules. Depth: 37 mm</p>	 <p>20449 Electronic alarm clock - 2 modules. Depth: 37 mm</p>	 <p>20448.B 24h/7day timer-switch, 1-canal, 8 A 230 V~ change-over relay output - 2 modules. Depth: 37 mm</p>	 <p>20449.B Electronic alarm clock - 2 modules. Depth: 37 mm</p>	 <p>20448.N 24h/7day timer-switch, 1-canal, 8 A 230 V~ change-over relay output - 2 modules. Depth: 37 mm</p>	 <p>20449.N Electronic alarm clock - 2 modules. Depth: 37 mm</p>
--	--	---	--	---	--

Grey

White

Next

Supervising - 10" IP multimedia video touch screen



■ **21553.1**
10" IP multimedia video touch screen for Due Fili Plus video door system and By-me system supervising by web server

Supervising - Full Flat video touch screen



21554
4,3" for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame, grey. Depth: 46,7 mm



21554.BN
4,3" for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame, neutral. Depth: 46,7 mm

Supervising - Full Flat touch screens



21511
4,3" for control, temperature sensor input, with built-in 8-module mounting frame, grey. Depth: 39,9 mm



21511.BN
4,3" for control, temperature sensor input, with built-in 8-module mounting frame, neutral. Depth: 39,9 mm



21512
For control, temperature sensor input, grey - 3 modules. Depth: 37 mm



21512.BN
For control, temperature sensor input, neutral - 3 modules. Depth: 37 mm

Supervising - Touch screens



20511.1
Color touch screen, 4,3", Energy, for control, 1 temperature sensor input, with built-in 8-module mounting frame. Depth: 25,5 mm



20511.1.B
Color touch screen, 4,3", Energy, for control, 1 temperature sensor input, with built-in 8-module mounting frame. Depth: 25,5 mm



20511.1.N
Color touch screen, 4,3", Energy, for control, 1 temperature sensor input, with built-in 8-module mounting frame. Depth: 25,5 mm

Grey

White

Next

Supervising - Touch screens



20512
Monochrome touch screen for local control - 3 modules.
Depth: 37 mm



20512.B
Monochrome touch screen for local control - 3 modules.
Depth: 37 mm



20512.N
Monochrome touch screen for local control - 3 modules.
Depth: 37 mm

Temperature sensor



20432
Electronic temperature sensor.
Depth: 24,4 mm



20432.B
Electronic temperature sensor.
Depth: 24,4 mm



20432.N
Electronic temperature sensor.
Depth: 24,4 mm

Supervising - Devices for DIN rail (60715 TH35) installation



01810
Phone dial for PSTN



01942
GSM phone dial, for direct connection to Bus 12-24 V~ 50/60 Hz or 12-30 Vdc (SELV)



01945
Web server for local and remote control of the By-me system via IP

Control units



21509
For control and configuration, touch display, temperature sensor input, for DIN rail (60715 TH35) or mounting installation - 3 modules.
Depth: 37 mm



21509.B
For control and configuration, touch display, temperature sensor input, for DIN rail (60715 TH35) or mounting installation - 3 modules.
Depth: 37 mm



21509.N
For control and configuration, touch display, temperature sensor input, for DIN rail (60715 TH35) or mounting installation - 3 modules.
Depth: 37 mm



20510°
Control unit - 2 modules. Not suitable for using with Eikon Tactil electronic devices and loads control range devices.
Depth: 26,5 mm



20510.B°
Control unit - 2 modules. Not suitable for using with Eikon Tactil electronic devices and loads control range devices.
Depth: 26,5 mm



20510.N°
Control unit - 2 modules. Not suitable for using with Eikon Tactil electronic devices and loads control range devices.
Depth: 26,5 mm

Grey

White

Next

Surface mounting control units



01950
Control unit with LCD 3,5" color monitor, white.
Not suitable for using with Eikon Tactil electronic devices and loads control range devices.



01950.14
Anthracite



01950.20
Silver

Flush mounting monitors - 8 modules



21550
3,5" LCD, to complete with control unit, video door entry or CCTV modules, with built-in 8-module mounting frame.
To complete with Eikon Evo cover plates.
Depth: 25,5 mm

20550
As above.
To complete with Eikon cover plates, except for Eikon Evo cover plates.
Depth: 25,5 mm



21550.B
3,5" LCD, to complete with control unit, video door entry or CCTV modules, with built-in 8-module mounting frame.
To complete with Eikon Evo cover plates.
Depth: 25,5 mm

20550.B
As above.
To complete with Eikon cover plates, except for Eikon Evo cover plates.
Depth: 25,5 mm



21550.N
3,5" LCD, to complete with control unit, video door entry or CCTV modules, with built-in 8-module mounting frame.
To complete with Eikon Evo cover plates.
Depth: 25,5 mm

20550.N
As above.
To complete with Eikon cover plates, except for Eikon Evo cover plates.
Depth: 25,5 mm

Color monitor modules



01960°
Control unit module.
Not suitable for using with Eikon Tactil electronic devices and loads control range devices.



01961°
Sound System video door entry system module



01962°
DigiBus video door entry system module



01963°
Due Fili Plus video door entry system module



01964°
CCTV system module

Video door entry - Devices



20555
Speakerphone for Sound System - 3 modules
20556 As above, for DigiBus system
20557 As above, for Due Fili Plus system.
Depth: 37 mm



20555.B
Speakerphone for Sound System - 3 modules
20556.B As above, for DigiBus system
20557.B As above, for Due Fili Plus system.
Depth: 37 mm



20555.N
Speakerphone for Sound System - 3 modules
20556.N As above, for DigiBus system
20557.N As above, for Due Fili Plus system.
Depth: 37 mm



20575
Call button for Sound System - 3 modules
20576 As above, for DigiBus system
20577 As above, for Due Fili Plus system.
Depth: 37 mm



20575.B
Call button for Sound System - 3 modules
20576.B As above, for DigiBus system
20577.B As above, for Due Fili Plus system.
Depth: 37 mm









20575.N
Call button for Sound System - 3 modules
20576.N As above, for DigiBus system
20577.N As above, for Due Fili Plus system.
Depth: 37 mm

Grey	White	Next
------	-------	------









Video door entry - Devices

 <p>20560 Inner color video camera. Depth: 37 mm</p>  <p>20565 Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm</p>	 <p>20560.B Inner color video camera. Depth: 37 mm</p>  <p>20565.B Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm</p>	 <p>20560.N Inner color video camera. Depth: 37 mm</p>  <p>20565.N Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm</p>
 <p>20570 Inner light, with LED. Depth: 37 mm</p>	 <p>20570.B Inner light, with LED. Depth: 37 mm</p>	 <p>20570.N Inner light, with LED. Depth: 37 mm</p>

Energy management - Temperature control

 <p>20513 Thermostat with display, for fan-coil - 2 modules. Depth: 26,5 mm</p>	 <p>20514 Thermostat with display - 2 modules. Depth: 26,5 mm</p>	 <p>20513.B Thermostat with display, for fan-coil - 2 modules. Depth: 26,5 mm</p>	 <p>20514.B Thermostat with display - 2 modules. Depth: 26,5 mm</p>	 <p>20513.N Thermostat with display, for fan-coil - 2 modules. Depth: 26,5 mm</p>	 <p>20514.N Thermostat with display - 2 modules. Depth: 26,5 mm</p>
---	--	--	--	--	--

Energy management - Loads control

 <p>▲20537 Actuator with relay output 16 A 120-230 V~ 50/60 Hz with incorporated current sensor - 2 modules. Depth: 37 mm</p>	 <p>▲20537.B Actuator with relay output 16 A 120-230 V~ 50/60 Hz with incorporated current sensor - 2 modules. Depth: 37 mm</p>	 <p>▲20537.N Actuator with relay output 16 A 120-230 V~ 50/60 Hz with incorporated current sensor - 2 modules. Depth: 37 mm</p>
 <p>▲01451 Energy meter with incorporated current sensor, measurable powers up to 3680 W, flush mounting (retrofit)</p>	 <p>▲01452 Pulse counter interface for measuring data from devices fitted with pulse outputs, such as electricity, water and gas meters, flush mounting (retrofit)</p>	
 <p>▲01457 Toroidal current sensor for load control and power measurement, hole diameter 7,5 mm, cable length 40 cm</p>	 <p>▲01458 Toroidal current sensor for load control and power measurement, hole diameter 19 mm, cable length 40 cm</p>	 <p>▲01459 Toroidal differential current sensor for power measurement, hole diameter 9 mm, cable length 40 cm</p>

Grey

White

Next

Energy management - Loads control - Devices for DIN rail (60715 TH35) installation



▲01450
Energy meter, 3 x inputs toroidal sensor, 25 W-100 kW, 120-230 V 50/60 Hz, 230/400 V 50/60 Hz.
Supplied with toroidal current sensor 01457



▲01455
Load control module, 3 x inputs toroidal sensor, 25 W-100 kW, 120-230 V 50/60 Hz, 230/400 V 50/60 Hz.
Supplied with toroidal current sensor 01457




▲01456
Actuator, 16 A 120-230 V~ 50/60 relay output for toroidal differential current sensor

Automation - Eikon Tactil devices



■ 21520
4 programmable buttons for 2 single controls or scenes - 2 modules.
Depth: 38 mm



■ 21540
6 programmable buttons for 3 single controls or scenes - 2 modules.
Depth: 38 mm

Automation - Devices



20520
2 simple push buttons - 2 modules.
Depth: 26,5 mm



20525
2 simple push buttons + 8 A 120-230 V~ change-over relay output actuator - 2 modules.
Depth: 37 mm



20521
2 rocker push buttons - 2 modules.
Depth: 26,5 mm



20526
2 rocker push buttons + 8 A 120-230 V~ change-over relay output actuator - 2 modules.
Depth: 37 mm



20527
2 rocker push buttons $\cos\phi$ 0,6 2 A 120-230 V~ actuator for 1 rolling shutter - 2 modules.
Depth: 37 mm



20527.1
2 rocker push buttons + actuator 1 roller shutter laths positioning, $\cos\phi$ 0,6 2 A 120-230 V~ - 2 modules.
Depth: 37 mm



20529
2 rocker push buttons + SLAVE-dimmer actuator - 2 modules. Depth: 37 mm



▲20529.120
2 rocker push buttons + 120 V~ SLAVE-dimmer actuator - 2 modules. Depth: 37 mm

Automation - Devices




20540
3 simple push buttons - 3 modules.
Depth: 37 mm



20545
3 simple push buttons + 8 A 120-230 V~ change-over relay output actuator - 3 modules.
Depth: 37 mm




20541
3 rocker push buttons - 3 modules.
Depth: 37 mm



20546
3 rocker push buttons + 8 A 120-230 V~ change-over relay output actuator - 3 modules.
Depth: 37 mm



20547
3 rocker push buttons + 3,5 A 120-230 V~ actuator for 1 rolling shutter - 3 modules.
Depth: 37 mm









20549
3 rocker push buttons + 40-300 W / 40-200 VA MASTER dimmer actuator - 3 modules.
Depth: 37 mm

Grey	White	Next
------	-------	------

Automation - 1-module interchangeable buttons

 <p>20531 No symbol, for simple push buttons 20531.0 As above, customizable</p>  <p>20531.S No symbol, for rocker push buttons 20531.S0 As above, customizable</p>  <p>20531.20 ON/OFF symbol for rocker push buttons</p>  <p>20531.21 Arrows symbol, for rocker push buttons</p>	 <p>20531.B No symbol, for simple push buttons 20531.0.B As above, customizable</p>  <p>20531.S.B No symbol, for rocker push buttons 20531.S0.B As above, customizable</p>  <p>20531.20.B ON/OFF symbol for rocker push buttons</p>  <p>20531.21.B Arrows symbol, for rocker push buttons</p>	 <p>20531.N No symbol, for simple push buttons 20531.0.N As above, customizable</p>  <p>20531.S.N No symbol, for rocker push buttons 20531.S0.N As above, customizable</p>  <p>20531.20.N ON/OFF symbol for rocker push buttons</p>  <p>20531.21.N Arrows symbol, for rocker push buttons</p>
 <p>20531.1T 1 name-plate, simple push buttons</p>  <p>20531.2T 2 name-plates, for rocker push buttons</p>  <p>20531.25 Universal regulation symbols, for rocker push buttons</p>	 <p>20531.1T.B 1 name-plate, simple push buttons</p>  <p>20531.2T.B 2 name-plates, for rocker push buttons</p>  <p>20531.25.B Universal regulation symbols, for rocker push buttons</p>	 <p>20531.1T.N 1 name-plate, simple push buttons</p>  <p>20531.2T.N 2 name-plates, for rocker push buttons</p>  <p>20531.25.N Universal regulation symbols, for rocker push buttons</p>

Automation - 2-module interchangeable buttons

 <p>20532 No symbol, for simple push buttons 20532.0 As above, customizable</p>  <p>20532.S No symbol, for rocker push buttons 20532.S0 As above, customizable</p>	 <p>20532.B No symbol, for simple push buttons 20532.0.B As above, customizable</p>  <p>20532.S.B No symbol, for rocker push buttons 20532.S0.B As above, customizable</p>	 <p>20532.N No symbol, for simple push buttons 20532.0.N As above, customizable</p>  <p>20532.S.N No symbol, for rocker push buttons 20532.S0.N As above, customizable</p>
 <p>20532.20 ON/OFF symbol for rocker push buttons</p>  <p>20532.21 Arrows symbol, for rocker push buttons</p>	 <p>20532.20.B ON/OFF symbol for rocker push buttons</p>  <p>20532.21.B Arrows symbol, for rocker push buttons</p>	 <p>20532.20.N ON/OFF symbol for rocker push buttons</p>  <p>20532.21.N Arrows symbol, for rocker push buttons</p>
 <p>20532.1T 1 name-plate, for simple push buttons</p>  <p>20532.25 Universal regulation symbols, for rocker push buttons</p>	 <p>20532.1T.B 1 name-plate, for simple push buttons</p>  <p>20532.25.B Universal regulation symbols, for rocker push buttons</p>	 <p>20532.1T.N 1 name-plate, for simple push buttons</p>  <p>20532.25.N Universal regulation symbols, for rocker push buttons</p>

Grey	White	Next
------	-------	------

Automation - Devices



20534
Actuator 6 A
120-230 V~
change-over
relay output.
Depth: 40 mm



20535
Actuator 16 A
120-230 V~
change-over relay
output - 2 modules.
Depth: 37 mm



20534.B
Actuator 6 A
120-230 V~
change-over
relay output.
Depth: 40 mm



20535.B
Actuator 16 A
120-230 V~
change-over relay
output - 2 modules.
Depth: 37 mm



20534.N
Actuator 6 A
120-230 V~
change-over
relay output.
Depth: 40 mm



20535.N
Actuator 16 A
120-230 V~
change-over relay
output - 2 modules.
Depth: 37 mm



20515
Interface for
traditional
switches 230 V~
/12-24 Vac/dc
- 2 modules.
Depth: 37 mm



20518
Interface for
traditional
controls.
Depth: 40 mm



20515.B
Interface for
traditional
switches 230 V~
/12-24 Vac/dc
- 2 modules.
Depth: 37 mm



20518.B
Interface for
traditional
controls.
Depth: 40 mm



20515.N
Interface for
traditional
switches 230 V~
/12-24 Vac/dc
- 2 modules.
Depth: 37 mm



20518.N
Interface for
traditional
controls.
Depth: 40 mm



20516
Remote control
receiver - 2 modules.
Depth: 26,5 mm



20516.B
Remote control
receiver - 2 modules.
Depth: 26,5 mm



20516.N
Remote control
receiver - 2 modules.
Depth: 26,5 mm



01849
IR remote control, 14-channel



20486
Orientable IR
presence detector
- 2 modules.
Depth: 26,5 mm



20485
IR presence
detector
- 2 modules.
Depth: 26,5 mm



20486.B
Orientable IR
presence detector
- 2 modules.
Depth: 26,5 mm



20485.B
IR presence
detector
- 2 modules.
Depth: 26,5 mm



20486.N
Orientable IR
presence detector
- 2 modules.
Depth: 26,5 mm



20485.N
IR presence
detector
- 2 modules.
Depth: 26,5 mm



20487
IR and microwaves
presence detector
- 2 modules.
Depth: 26,5 mm



20487.B
IR and microwaves
presence detector
- 2 modules.
Depth: 26,5 mm



20487.N
IR and microwaves
presence detector
- 2 modules.
Depth: 26,5 mm

Grey

White

Next

Automation - Devices



00802.14
Orientable support
- 2 modules



00805.14
Adaptor for orientable support flush mounting
- 2 modules.
Depth: 36,5 mm



00800.14
Frame for orientable support surface mounting



00802
Orientable support
- 2 modules



00805
Adaptor for orientable support flush mounting
- 2 modules.
Depth: 36,5 mm



00800
Frame for orientable support surface mounting



00802.20
Orientable support
- 2 modules



00805.20
Adaptor for orientable support flush mounting
- 2 modules.
Depth: 36,5 mm



00800.20
Frame for orientable support surface mounting

Radiofrequency home automation - With EnOcean module



20505
2 flat rocker buttons with EnOcean wireless connection, no battery, to complete with 20506 - 2 modules.
Depth: 3,5 mm



01796
Actuator with EnOcean module, relay output, supply voltage 230 V~ 50 Hz



21507
Frame for surface mounting of 20505, only for Eikon Evo cover plate, grey



21507.B
Frame for surface mounting of 20505, only for Eikon Evo cover plate, white



20507
Frame for surface mounting of 20505, grey



20507.B
Frame for surface mounting of 20505, grey



20506
Pair of buttons for 20505 device, customizable



20508
Bus-RF interface
- 2 modules



20506.B
Pair of buttons for 20505 device, customizable



20508.B
Bus-RF interface
- 2 modules



20506.N
Pair of buttons for 20505 device, customizable



20508.N
Bus-RF interface
- 2 modules

Automation - Electronic transformers (230-240 V~ 50/60 Hz)



01860.60
20-60 W,
12 V~ (SELV) output



01860.105
20-105 W,
12 V~ (SELV) output

Automation - Electronic supply unit



01874
230 V~ 50 Hz, for controllable
LED lamps, 12-24 Vdc
▲**01874.120**
As above, 120 V~



01875
230 V~ 50 Hz, for controllable
LED lamps, 350/500/700 mA
▲**01875.120**
As above, 120 V~



01877
For controllable LED RGB lamps,
12-24 Vdc
▲**01877.120**
As above, 120 V~

Automation - Devices for DIN rail (60715 TH35) installation



01850.2
Actuator with
16 A 120-230 V~
change-over relay
output



01851.2
Actuator with 4 16 A
120-230 V~ change-
over relay outputs,
with fan-coil function



01852.2
Actuator for 2 roller
blinds with lath posi-
tioning, 16 A 120-
230 V~ change-over
relay output



01856
Actuator 0-10 Vdc for
ballast control, 120-
230 V~ change-over
relay output



***01861**
MASTER dimmer,
40-1000 W/VA,
230 V~,
MOSFET+TRIAC



***01862**
SLAVE dimmer,
40-1000 W/VA, 230 V~,
MOSFET+TRIAC



01863
MASTER dimmer,
40-800 W/VA 50 Hz,
40-700 W/VA 60 Hz,
230 V~,
MOSFET+TRIAC



01864
SLAVE dimmer,
40-800 W/VA 50 Hz,
40-700 W/VA 60 Hz,
230 V~,
MOSFET+TRIAC



***01865**
MASTER dimmer,
40-700 VA, 230 V~
50/60 Hz, MOSFET



***01866**
SLAVE dimmer,
40-700 VA, 230 V~
50/60 Hz, MOSFET



01867
MASTER dimmer,
40-500 VA 50 Hz,
40-400 VA 60 Hz,
230 V~, MOSFET



01868
SLAVE dimmer,
40-500 VA 50 Hz,
40-400 VA 60 Hz,
230 V~, MOSFET



01870
MASTER dimmer,
40-500 W, 40-300 VA,
CFL 10-200 W, LED
3-200 W, 230 V~
▲**01870.120**
As above, 120 V~



01871
SLAVE dimmer,
40-500 W, 40-300 VA,
CFL 10-200 W, LED
3-200 W, 230 V~
▲**01871.120**
As above, 120 V~



01845
Line coupler



01801
Supply unit, 29 Vdc 800 mA output,
120-230 V~ 50/60 Hz



01842
Decoupling coil

Grey

White

Next

Sound system - Devices



20580
Supply unit,
32 Vdc 100 mA
output,
110-230 V~
50/60 Hz.
Depth: 40 mm



20582
Audio input with 2 RCA
connectors, automatic
volume adjustment,
incorporated line
terminator - 2 modules.
Depth: 37 mm



20580.B
Supply unit,
32 Vdc 100 mA
output,
110-230 V~
50/60 Hz.
Depth: 40 mm



20582.B
Audio input with 2 RCA
connectors, automatic
volume adjustment,
incorporated line
terminator - 2 modules.
Depth: 37 mm



20580.N
Alimentatore con
uscita 32 Vdc 100
mA, 110-230 V~
50/60 Hz.
Depth: 40 mm



20582.N
Audio input with 2 RCA
connectors, automatic
volume adjustment,
incorporated line
terminator - 2 modules.
Depth: 37 mm



20583
Spring
connector for
speaker.
Depth: 19,4 mm



20584
Interface for By-me
devices and IR receiver,
with 3 m of cable.
Depth: 41 mm



20583.B
Spring
connector for
speaker.
Depth: 19,4 mm



20584.B
Interface for By-me
devices and IR receiver,
with 3 m of cable.
Depth: 41 mm



20583.N
Spring
connector for
speaker.
Depth: 19,4 mm



20584.N
Interface for By-me
devices and IR receiver,
with 3 m of cable.
Depth: 41 mm



20585
Docking station for iPod/iPhone device
and supply unit - 2 + 2 modules.
Depth: 37 mm



20585.B
Docking station for iPod/iPhone device
and supply unit - 2 + 2 modules.
Depth: 37 mm




20585.N
Docking station for iPod/iPhone device
and supply unit - 2 + 2 modules.
Depth: 37 mm



20586
Microphone for selective or general call,
voice activation function for monitoring
children - 2 modules. Depth: 37 mm



20586.B
Microphone for selective or general call,
voice activation function for monitoring
children - 2 modules. Depth: 37 mm



20586.N
Microphone for selective or general call,
voice activation function for monitoring
children - 2 modules. Depth: 37 mm



20581
2 rocker push buttons and 8 Ω 1+1 W
amplifier, integrated line terminator,
to complete with interchangeable
buttons - 2 modules. Depth: 37 mm

Sound system - 1-module interchangeable buttons



20531.23
Function/track
change symbols,
for rocker push
buttons



20531.24
O I and volume
adjustment symbols,
for rocker push
buttons



20531.23.B
Function/track
change symbols,
for rocker push
buttons



20531.24.B
O I and volume
adjustment symbols,
for rocker push
buttons



20531.23.N
Function/track
change symbols,
for rocker push
buttons



20531.24.N
O I and volume
adjustment symbols,
for rocker push
buttons

Grey

White

Next

Sound system - Retrofit devices



01903
Branch shunt for By-me devices, flush mounting (retrofit)



01904
Branch shunt for sound system devices, flush mounting (retrofit)

Sound system - Speakers



21588
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm




21588.B
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm




21588.N
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm



20587
Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm



20587.B
Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm



20587.N
Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm



01906
IP55 passive speaker, 8 Ω 30 W, for hollow walls and false ceiling installation



01907
Passive speaker, 8 Ω 30 W, for hollow walls and false ceiling installation



01908
Passive speaker, 8 Ω 30 W, orientable, for surface mounting

Sound system - Devices for DIN rail (60715 TH35) installation



01900
FM radio tuner with RDS, coaxial connector for external FM antenna, built-in line terminator



01901
Stereo amplifier, 2 outputs for sound diffusers 8 Ω 10+10 W, power supply 110-230 V~ 50/60 Hz, built-in line terminator



01902
Bus line/sound diffusion decoupler for By-me power supply, built-in line terminator

Grey

White

Next

Bus burglar alarm system - Control



20480°
Control and configuration unit
- 2 modules.
Depth: 26,5 mm



20483
Digital keypad
- 2 modules.
Depth: 26,5 mm



20482
Activator/partialiser
- 2 modules.
Depth: 26,5 mm



20480.B°
Control and configuration unit
- 2 modules.
Depth: 26,5 mm



20483.B
Digital keypad
- 2 modules.
Depth: 26,5 mm



20482.B
Activator/partialiser
- 2 modules.
Depth: 26,5 mm



20480.N°
Control and configuration unit
- 2 modules.
Depth: 26,5 mm



20483.N
Digital keypad
- 2 modules.
Depth: 26,5 mm



20482.N
Activator/partialiser
- 2 modules.
Depth: 26,5 mm



01815
Transponder key



01816
Transponder card
01816.H
As above, customizable

Bus burglar alarm system - Devices



20490.1
Contact interface with two independent inputs which can be configured in different zones
- 2 modules.
Depth: 26,5 mm



20491
Contacts interface with configurable input, 12 Vdc 10 mA output
- 2 modules.
Depth: 26,5 mm



20490.1.B
Contact interface with two independent inputs which can be configured in different zones
- 2 modules.
Depth: 26,5 mm



20491.B
Contacts interface with configurable input, 12 Vdc 10 mA output
- 2 modules.
Depth: 26,5 mm



20490.1.N
Contact interface with two independent inputs which can be configured in different zones
- 2 modules.
Depth: 26,5 mm



20491.N
Contacts interface with configurable input, 12 Vdc 10 mA output
- 2 modules.
Depth: 26,5 mm



20493
Interface Bus-RF, two-way dual band,
- 2 modules.
Depth: 26,5 mm



20493.B
Interface Bus-RF, two-way dual band,
- 2 modules.
Depth: 26,5 mm



20493.N
Interface Bus-RF, two-way dual band,
- 2 modules.
Depth: 26,5 mm



20486
Orientable IR presence detector
- 2 modules.
Depth: 26,5 mm



20485
IR presence detector
- 2 modules.
Depth: 26,5 mm



20486.B
Orientable IR presence detector
- 2 modules.
Depth: 26,5 mm



20485.B
IR presence detector
- 2 modules.
Depth: 26,5 mm



20486.N
Orientable IR presence detector
- 2 modules.
Depth: 26,5 mm



20485.N
IR presence detector
- 2 modules.
Depth: 26,5 mm



20487
IR and microwaves presence detector
- 2 modules.
Depth: 26,5 mm



20487.B
IR and microwaves presence detector
- 2 modules.
Depth: 26,5 mm



20487.B
IR and microwaves presence detector
- 2 modules.
Depth: 26,5 mm

Grey	White	Next
------	-------	------

Bus burglar alarm system - Devices



00802.14
Orientable support
- 2 modules



00805.14
Adaptor for orientable support flush mounting
- 2 modules.
Depth: 36,5 mm



00800.14
Frame for orientable support surface mounting



00802
Orientable support
- 2 modules



00805
Adaptor for orientable support flush mounting
- 2 modules.
Depth: 36,5 mm



00800
Frame for orientable support surface mounting



00802.20
Orientable support
- 2 modules



00805.20
Adaptor for orientable support flush mounting
- 2 modules.
Depth: 36,5 mm



00800.20
Frame for orientable support surface mounting



16897.S
Antitamper kit for orientable supports



20489
Actuator, 1 A 30 V change-over relay output - 2 modules.
Depth: 26,5 mm



20495
Self-powered indoor siren - 3 modules.
Depth: 27 mm




20489.B
Actuator, 1 A 30 V change-over relay output - 2 modules.
Depth: 26,5 mm



20495.B
Self-powered indoor siren - 3 modules.
Depth: 27 mm



20489.N
Actuator, 1 A 30 V change-over relay output - 2 modules.
Depth: 26,5 mm



20495.N
Self-powered indoor siren - 3 modules.
Depth: 27 mm

Bus burglar alarm system - Back-up unit



01804.14
Back-up unit, with inner siren
01803.14
Auxiliary battery holder unit for 01804...
Depth: 61 mm



01804.01
Back-up unit, with inner siren
01803.01
Auxiliary battery holder unit for 01804...
Depth: 61 mm



01804.N
Back-up unit, with inner siren
01803.N
Auxiliary battery holder unit for 01804...
Depth: 61 mm



16895
Flush mounting box for 01803....., 01804...



16895.C
Cover for 16895, white
16895.A
As above, antimortar, plasticized

By-me

Bus burglar alarm system - For surface mounting



01806
Outdoor siren



01828
Mini IR presence detector,
for surface mounting



01829.1
Surface dual-technology
infrared presence detector



01810
Phone dial for PSTN

Bus burglar alarm system - Detectors and contacts



01820
Flush mounting
magnetic contact



01821
Metal flush mounting
magnetic contact



01822
Visible surface
magnetic contact



01823
Metal magnetic
contact



01825
Electromechanical cord-
operated contact for roll-
ing shutters protection



01826
Electromechanical inertial
contact for windows and
doors protection



01832.056
Active IR multi-beam protection rail,
NC 50 V relay output, 56 cm long

01832.076
As above, 76 cm long

01832.112
As above, 112 cm long

01832.152
As above, 152 cm long

01832.200
As above, 200 cm long

Radiofrequency burglar alarm system - Devices



01819
Two-way
remote control



01737
Supervised
IR detector,
dual-band



01738
Supervised detector with
magnetic contact for windows
and doors protection, dual-band



01744
Supervised water detector for
protection against flooding,
dual-band



01747
Supervised two-way
outdoor siren,
dual-band



00912
9 V 12 Ah spare part
battery for
outdoor siren

Burglar alarm system - Devices for DIN rail (60715 TH35) installation



01800
Supply unit, 29 Vdc 320
mA output,
120-230 V~ 50/60 Hz



01830
Supply unit 12 Vdc
output, 120-230 V~
50/60 Hz



01807
Back-up unit with decou-
pling, BUS+AUX 600 mA
output, 29 Vdc



01809
Battery holder for
consumer unit

Grey	White	Next
------	-------	------

Safety and security - Emergency lighting devices



02661
With high-efficiency LED, 230 V~ 50/60 Hz, rechargeable Ni-Cd battery and built-in 6/7-module frame. Depth: 44,7 mm



01846
Emergency lighting management interface through Bus By-me



00913
Ni-Cd 4,8 V 800 mAh spare rechargeable battery for 02661

Access control system - Devices



20470
Transponder card and key reader - 2 modules. Depth: 26,5 mm



20471
Smart card reader and programmer - 3 modules. Depth: 37 mm



20470.B
Transponder card and key reader - 2 modules. Depth: 26,5 mm



20471.B
Smart card reader and programmer - 3 modules. Depth: 37 mm



20470.N
Transponder card and key reader - 2 modules. Depth: 26,5 mm



20471.N
Smart card reader and programmer - 3 modules. Depth: 37 mm



20472
Actuator with 3 A 30 V change-over relay output - 2 modules. Depth: 26,5 mm



20473
Smart card programmer in table mounting box - 4 modules



20472.B
Actuator with 3 A 30 V change-over relay output - 2 modules. Depth: 26,5 mm



20473.B
Smart card programmer in table mounting box - 4 modules



20472.N
Actuator with 3 A 30 V change-over relay output - 2 modules. Depth: 26,5 mm



20473.N
Smart card programmer in table mounting box - 4 modules

Access control system - Accessories



01816
Transponder card
01816.H
As above, customizable



01815
Transponder key



16452
Programmable smart card
16452.H
As above, customizable

Access control system - Devices for DIN rail (60715 TH35) installation



01800
Supply unit, 29 Vdc 320 mA output, 120-230 V~ 50/60 Hz



01842
Decoupling coil

Accessories and cables



01839
Removable 2 screw terminals, for Bus system



01840
Bus system cable, halogen-free 2x0,50 mm², rated operating voltage to earth 400 V, suitable for I category cables, white - 100 m



01840.B
Cable for sound system, halogen-free 2x0,50 mm², rated operating voltage to earth 400 V, suitable for I category cables, blue - 100 m



01840.Y
Bus buglar alarm system cable, halogen-free 2x0,50 mm², rated operating voltage to earth 400 V, suitable for I category cables, yellow - 100 m

By-me • Stand-alone systems

Grey

White

Next

Software and interfaces



01997.2
Software to interface By-me system and Windows Media Center® for Windows Vista and 7 (32 bit)



01992
EasyTool Professional software suite for By-me system and EasyDraw and EasyCap softwares



01991
EasyTool Professional LT software suite for By-me, Well-contact Plus configurator and EasyDraw and EasyCap softwares



02024
EVCom software for Due Fili video entry system, with USB interface



01996
Interface for Due Fili video door entry system connection, from special RJ11 jack to PC with Windows Media Center®

Special Bus RJ11 jacks



20329
Special jack for Bus, screw terminals.
Depth: 33,6 mm



20329.B
Special jack for Bus, screw terminals.
Depth: 33,6 mm



20329.N
Special jack for Bus, screw terminals.
Depth: 33,6 mm

Stand-alone access control system



20461
Smart card reader/programmer, 12-24 V~ 50/60 Hz/ 12-24 Vdc (SELV) - 3 modules.
Depth: 37 mm



20465
Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules.
Depth: 37 mm



20461.B
Smart card reader/programmer, 12-24 V~ 50/60 Hz/ 12-24 Vdc (SELV) - 3 modules.
Depth: 37 mm



20465.B
Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules.
Depth: 37 mm



20461.N
Smart card reader/programmer, 12-24 V~ 50/60 Hz/ 12-24 Vdc (SELV) - 3 modules.
Depth: 37 mm



20465.N
Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules.
Depth: 37 mm



16474
Smart card for serial connection of reader/programmer



16452
Programmable smart card
16452.H
As above, customizable



16452.S
ISO-card (badge)

Stand-alone radio devices - With EnOcean module



20505
2 flat rocker buttons with EnOcean wireless connection, no battery, to complete with 20506 - 2 modules.
Depth: 3,5 mm



01796
Actuator with EnOcean module, relay output, supply voltage 230 V~ 50 Hz

Stand-alone systems • Accessories

Grey	White	Next
------	-------	------

Stand-alone radio devices - With EnOcean module



20507
Frame for surface mounting of 20505, grey



20507.B
Frame for surface mounting of 20505, white



21507
Frame for surface mounting of 20505, only for Eikon Evo cover plate, grey



21507.B
Frame for surface mounting of 20505, only for Eikon Evo cover plate, white



20506
Pair of buttons for 20505 device, customizable



20506.B
Pair of buttons for 20505 device, customizable



20506.N
Pair of buttons for 20505 device, customizable

LED signalling units



00935.A: 12-24 V~ 0,1 W, amber

00935.G: 12-24 V~ 0,1 W, green

00935.R: 12-24 V~ 0,1 W, red

00935.B: 12-24 V~ 0,1 W, blue

00935.W: 12-24 V~ 0,1 W, white

00936.A: 110-250 V~ 0,5 W, amber

00936.G: 110-250 V~ 0,5 W, green

00936.R: 110-250 V~ 0,5 W, red

00936.B: 110-250 V~ 0,5 W, blue

00936.W: 110-250 V~ 0,5 W, white

LED signalling units for axial switches



00937.A: 12-24 V~ 0,1 W, amber

00937.G: 12-24 V~ 0,1 W, green

00937.R: 12-24 V~ 0,1 W, red

00937.B: 12-24 V~ 0,1 W, blue

00937.W: 12-24 V~ 0,1 W, white

00938.A: 110-250 V~ 0,1 W, amber

00938.G: 110-250 V~ 0,1 W, green

00938.R: 110-250 V~ 0,1 W, red

00938.B: 110-250 V~ 0,1 W, blue

00938.W: 110-250 V~ 0,1 W, white

Pre-wired signalling units



00930
250 V~ 0,3 W, red suitable for British standard socket outlets



00931
110-250 V~ 0,5 W, amber

E10 10x28 mm lamps



Neon:

14778
110 V~ 0,5 W, red¹

14779
230 V~ 0,5 W, red¹



Incandescent:

14770
12 V~ 3 W, white¹

14771
24 V~ 3 W, white¹

14774
12 V~ 0,6 W, white¹

14775
24 V~ 1,2 W, white¹

14776
130 V~ 2,6 W, white¹

14777
230 V~ 3 W, white¹

Transparent cover for mounting frames



▲21602.C
For 2-module frame, 71 mm fixing centres



▲21613.C
For 3-module frame



▲21614.C
For 4-module frame



▲21618.C
For 8 (4+4)-module frame



▲21617.C
For 7-module frame

¹ The indicated colour is that of emitted light

Well-contact Plus

Grey

White

Next

Building automation - Control



■ **21553.1**
10" IP multimedia video touch screen for Due Fill Plus video door system and By-me system supervising by web server



■ **21848**
Color touch screen, 4,3", Full Flat, for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box. Depth: 50,4 mm



■ **21848.BN**
Color touch screen, 4,3", Full Flat, for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box. Depth: 50,4 mm



■ **20848.1**
Color touch screen, 4,3", for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box. Depth: 39,9 mm



■ **20848.1.B**
Color touch screen, 4,3", for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box. Depth: 39,9 mm



■ **20848.1.N**
Color touch screen, 4,3", for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box. Depth: 39,9 mm



■ **21849**
Monochrome touch screen, for the room control - 3 modules. Depth: 37 mm



■ **21849.BN**
Monochrome touch screen, for the room control - 3 modules. Depth: 37 mm



■ **20849**
Monochrome touch screen, for the room control - 3 modules. Depth: 37 mm



■ **20432**
Electronic temperature sensor. Depth: 24,4 mm



■ **20849.B**
Monochrome touch screen, for the room control - 3 modules. Depth: 37 mm



■ **20432.B**
Electronic temperature sensor. Depth: 24,4 mm



■ **20849.N**
Monochrome touch screen, for the room control - 3 modules. Depth: 37 mm



■ **20432.N**
Electronic temperature sensor. Depth: 24,4 mm

Building automation - Devices for DIN rail (60715 TH35) installation



■ **01545**
Web server for local and remote control of the KNX system

Well-contact Plus

Grey	White	Next
------	-------	------


Building automation - Control device



■ **20840**
Control device with four independent push buttons, KNX standard, visible in darkness, to be completed with half-buttons - 2 modules. Depth: 20 mm



■ **21840**
4 independently programmable buttons for single controls or scenes, KNX standard, for Eikon Tactil - 2 modules. Depth: 38 mm



■ **21860**
6 independently programmable buttons for single controls or scenes, KNX standard, for Eikon Tactil - 3 modules. Depth: 38 mm

Building automation - 1-module interchangeable half-buttons



■ **20841**
Four half-buttons without symbol



■ **20841.0**
Four half-buttons, O symbol



■ **20841.1**
Four half-buttons, I symbol



■ **20841.B**
Four half-buttons without symbol



■ **20841.0.B**
Four half-buttons, O symbol



■ **20841.1.B**
Four half-buttons, I symbol



■ **20841.N**
Four half-buttons without symbol



■ **20841.0.N**
Four half-buttons, O symbol



■ **20841.1.N**
Four half-buttons, I symbol



■ **20841.2**
Four half-buttons, I O symbol



■ **20841.3**
Four half-buttons, directional arrows symbol



■ **20841.4**
Four half-buttons, regulation symbol



■ **20841.2.B**
Four half-buttons, I O symbol



■ **20841.3.B**
Four half-buttons, directional arrows symbol



■ **20841.4.B**
Four half-buttons, regulation symbol



■ **20841.2.N**
Four half-buttons, I O symbol



■ **20841.3.N**
Four half-buttons, directional arrows symbol



■ **20841.4.N**
Four half-buttons, regulation symbol



■ **20843**
Four fixed half-buttons, without symbol



■ **20843.B**
Four fixed half-buttons, without symbol



■ **20843.N**
Four fixed half-buttons, without symbol


Building automation - 2-module interchangeable half-buttons



■ **20842**
Two half-buttons without symbol



■ **20842.0**
Two half-buttons, O symbol



■ **20842.1**
Two half-buttons, I symbol



■ **20842.B**
Two half-buttons without symbol



■ **20842.0.B**
Two half-buttons, O symbol



■ **20842.1.B**
Two half-buttons, I symbol



■ **20842.N**
Two half-buttons without symbol



■ **20842.0.N**
Two half-buttons, O symbol



■ **20842.1.N**
Two half-buttons, I symbol



■ **20842.2**
Two half-buttons, I O symbol



■ **20842.3**
Two half-buttons, directional arrows symbol



■ **20842.4**
Two half-buttons, regulation symbol



■ **20842.2.B**
Two half-buttons, I O symbol



■ **20842.3.B**
Two half-buttons, directional arrows symbol



■ **20842.4.B**
Two half-buttons, regulation symbol



■ **20842.2.N**
Two half-buttons, I O symbol



■ **20842.3.N**
Two half-buttons, directional arrows symbol



■ **20842.4.N**
Two half-buttons, regulation symbol



■ **20844**
Two fixed half-buttons, without symbol



■ **20844.B**
Two fixed half-buttons, without symbol



■ **20844.N**
Two fixed half-buttons, without symbol

Well-contact Plus

Grey	White	Next
------	-------	------

Building automation - Control

 <p>■ 20850 Passive infrared presence detector, KNX standard - 2 modules. Depth: 26,5 mm</p>	 <p>■ 00802.14 Orientable support - 2 modules</p>	 <p>■ 20850.B Passive infrared presence detector, KNX standard - 2 modules. Depth: 26,5 mm</p>	 <p>■ 00802 Orientable support - 2 modules</p>	 <p>■ 20850.N Passive infrared presence detector, KNX standard - 2 modules. Depth: 26,5 mm</p>	 <p>■ 00802.20 Orientable support - 2 modules</p>
 <p>■ 00805.14 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm</p>	 <p>■ 00800.14 Frame for orientable support surface mounting</p>	 <p>■ 00805 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm</p>	 <p>■ 00800 Frame for orientable support surface mounting</p>	 <p>■ 00805.20 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm</p>	 <p>■ 00800.20 Frame for orientable support surface mounting</p>

Building automation - Access control

 <p>■ 20457 Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm</p>	 <p>■ 20453 Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, supplementary power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm</p>	 <p>■ 20457.B Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm</p>	 <p>■ 20453.B Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, supplementary power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm</p>	 <p>■ 20457.N Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm</p>	 <p>■ 20453.N Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, supplementary power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm</p>
 <p>■ 20450 Transponder card reader/programmer, in 4-module table mounting box. To complete with 4-module cover plate</p>	 <p>■ 20450.B Transponder card reader/programmer, in 4-module table mounting box. To complete with 4-module cover plate</p>	 <p>■ 20450.N Transponder card reader/programmer, in 4-module table mounting box. To complete with 4-module cover plate</p>			



■ **01598**
Programmable and customizable transponder card

Well-contact Plus

Grey	White	Next
------	-------	------

Building automation - Temperature control



■ **20430**
Thermostat for ambient temperature control of 2 independent zones (heating and air-conditioning), KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432) input + 1 programmable input - 2 modules. Depth: 37 mm



■ **20430.B**
Thermostat for ambient temperature control of 2 independent zones (heating and air-conditioning), KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432) input + 1 programmable input - 2 modules. Depth: 37 mm



■ **20430.N**
Thermostat for ambient temperature control of 2 independent zones (heating and air-conditioning), KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432) input + 1 programmable input - 2 modules. Depth: 37 mm



■ **20432**
Electronic temperature sensor. Depth: 24,4 mm



■ **20432.B**
Electronic temperature sensor. Depth: 24,4 mm



■ **20432.N**
Electronic temperature sensor. Depth: 24,4 mm

Building automation - Devices for DIN rail (60715 TH35) installation



■ **01510**
4-channel digital input device, programmable for NO, NC and 120-230 V~ contacts, KNX standard



■ **01523**
Actuator with 4 NO 16 A 250 V~ relay outputs, KNX standard



■ **01522**
Input/output device, 4 NO 16 A 250 V~ relay outputs, 4 inputs for NO contacts, KNX standard



■ **01524**
Actuator for 2 roller shutters, 16 A 250 V~ relay outputs, KNX standard



■ **01528**
Dimmer, 2 inputs for 01530, 2 NO 16 A 250 V~ relay outputs, 2 1-10 V outputs, KNX standard



■ **01526**
Dimmer 230 V~ 50/60 Hz for 2x300 W incandescent lamps, 2x300 VA ferromagnetic transformers, 2x300 VA electronic transformers, KNX standard



■ **01530**
Light sensor for dimmer 01528, KNX standard, ceiling installation



■ **01515**
Interface with 4 input or output programmable channels for LEDs, KNX standard



■ **01500**
Power supply with Bus 30 Vdc 320 mA output, supply voltage 230 V~ 50/60 Hz, with decoupling coil, KNX standard



■ **01501**
Power supply with Bus 30 Vdc 640 mA output, 30 V d.c auxiliary output, supply voltage 230 V~ 50/60 Hz, with decoupling coil, KNX standard



■ **01504**
Line coupler, KNX standard



■ **01540**
USB interface, KNX B-type



16887
Safety transformer, 230/12-24 V~ (SELV), 24 VA

KNX cable



■ **01890**
2x2x0,8 mm cable, KNX standard

Software and interface



Software for Well-contact Plus system management.

- **01589:** Well-contact Suite Light
- **01590:** Well-contact Suite Basic
- **01591:** Well-contact Suite Top
- **01592:** Well-contact Suite Client
- **01593:** Well-contact Suite Office
- **01594:** Well-contact Suite Client Office














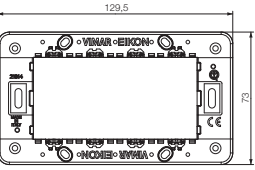
■ **01595**
Additional software for interfacing with existing management system

■ **01597**
USB spare key for Well-contact Suite software






■ **01991**
Suite software EasyTool Professional LT for By-me, Well-contact Plus touch screen configurator and software EasyDraw and EasyCap

Eikon Tactil: standard types of mounting

Module	Box	Frame
<p>2 for ø 60 mm or 56x56 mm mounting box</p>	<p>Flush mounting</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p> </div> <div style="text-align: center;">  <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p> </div> </div>	<div style="display: flex; flex-direction: column; align-items: flex-start;"> <div style="display: flex; align-items: center; margin-bottom: 20px;">  <div style="margin-left: 10px;"> <p>21602 2-module, with claws</p> </div> <div style="margin-left: 20px;">  </div> </div> <div style="display: flex; align-items: center;">  <div style="margin-left: 10px;"> <p>21603 2-module, without screws</p> </div> <div style="margin-left: 20px;">  </div> </div> </div>
<p>3</p>	<p>Flush mounting</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p> </div> <div style="text-align: center;">  <p>V71703 For hollow walls GW 850 °C, light blue</p> </div> </div>	<div style="display: flex; flex-direction: column; align-items: flex-start;"> <div style="display: flex; align-items: center; margin-bottom: 20px;">  <div style="margin-left: 10px;"> <p>21613 3-module, with screws</p> </div> </div> <div style="display: flex; align-items: center;">  </div> </div>
<p>4</p>	<p>Flush mounting</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black</p> </div> <div style="text-align: center;">  <p>V71704 For hollow walls GW 850 °C, light blue</p> </div> </div>	<div style="display: flex; flex-direction: column; align-items: flex-start;"> <div style="display: flex; align-items: center; margin-bottom: 20px;">  <div style="margin-left: 10px;"> <p>21614 4-module, with screws</p> </div> </div> <div style="display: flex; align-items: center;">  </div> </div>

Eikon Tactil: standard types of mounting

Cover plate	Material and finishing availability*
 <p>■ 21662... 2-module Dimensions: 94,7x94,7 mm</p>	<p>Luminosi</p> <ul style="list-style-type: none"> .70 White diamond .71 Aqua .73 Pearl grey .76 Black Diamond
 <p>■ 21663... 3-module Dimensions: 117,3x105,3 mm</p>	<p>Luminosi</p> <ul style="list-style-type: none"> .70 White diamond .71 Aqua .73 Pearl grey .76 Black Diamond
 <p>■ 21664... 4-module Dimensions: 139,8x105,3 mm</p>	<p>Luminosi</p> <ul style="list-style-type: none"> .70 White diamond .71 Aqua .73 Pearl grey .76 Black Diamond

* Cover plates range, page 91

■ Please, contact the commercial network for further information

Eikon Tactil: customization

Eikon Tactil devices customization

Information

- the electronic devices have been customized with a Mylar label application (21847), in the pre-set area;
- The labels include the most common symbols used in an electrical or automation system;
- the symbol is backlit, in amber if the device is installed in a conventional electrical system or with RGB colours if installed and programmed in a By-me or Well-contact Plus systems.



Device customized with labels



Mylar labels

Available symbols in Mylar labels 21847 (Some symbols are repeated several times)

						ON	OFF						...
Repetition	10	1	1	1	1	5	5	1	2	1	1	1	8
Repetition	3	2	4	5	2	4	1	1	1	3	3	3	2
Repetition	1	1	1	1	1	1	3	3	1	1	1	1	2
													APRE
Repetition	1	1	1	1	1	1	1	1	1	2	2	2	1
													CHIUDE
Repetition	1	1	2	2	2	2	2	2	2	2	2	2	1
	1	2	3	4	5	6							
Repetition	1	1	1	1	1	1	1	2	2	1	2	2	2
Repetition	3	3	3	2	3	2	2	2	2	2	2	2	2
			GENERALE	GENERAL	ALARM	LUCE	LIGHT	BAGNO	BATHROOM	OPEN	CLOSE	ESTERNO	
Repetition	2	2	1	1	2	1	1	1	1	1	1	1	1
	SCALE	STAIRS	GARAGE	GIARDINO	GARDEN	TERRAZZA	TERRACE	OUTSIDE	ATTIC	SOLAIO	CANTINA	CELLAR	
Repetition	1	1	2	1	1	1	1	1	1	1	1	1	1

Luminosi (Bevelled crystal)



70 White diamond



71 Aqua














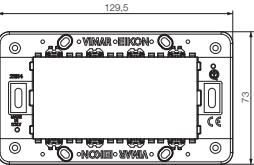



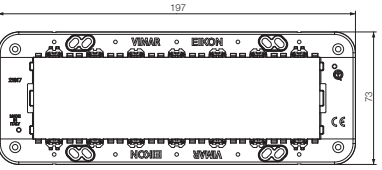


73 Pearl grey



76 Black Diamond

Eikon Evo: standard types of mounting

Module	Box	Frame
2 for ø 60 mm or 56x56 mm mounting box	<p>Flush mounting</p>  <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p>  <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>	 <p>21602 2-module, with claws</p>   <p>21603 2-module, without screws</p> 
3	<p>Flush mounting</p>  <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p>  <p>V71703 For hollow walls GW 850 °C, light blue</p>	 <p>21613 3-module, with screws</p> 
4	<p>Flush mounting</p>  <p>V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black</p>  <p>V71704 For hollow walls GW 850 °C, light blue</p>	 <p>21614 4-module, with screws</p> 
7	<p>Flush mounting</p>  <p>V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black</p>  <p>V71706 For hollow walls GW 850 °C, light blue</p>	 <p>21617 7-module, with screws</p> 

Eikon Evo: standard types of mounting


Cover plate	Material and finishing availability*							
	Primari	Esclusivi	Scolpiti	Naturali	Luminosi	Speciali (Corian®)	Raffinati	Essenziali
 <p>21642... 2-module Dimensions: 94,7x94,7 mm</p>	●	●	●	●	●	●	●	●
 <p>21653... 3-module Dimensions: 117,3x105,3 mm</p>	●	●	●	●	●	●	●	●
 <p>21654... 4-module Dimensions: 139,8x105,3 mm</p>	●	●	●	●	●	●	●	●
 <p>21657... 7-module Dimensions: 207,3x105,3 mm</p>	●	●	●	●	●	●	●	●

* Cover plates range, page 104

Eikon Evo: standard types of mounting







Module	Box	Touch screen
<p>8 (4+4)</p>	<p>Flush mounting</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>V71318 For masonry GW 650 °C, light blue</p> </div> <div style="text-align: center;">  <p>V71718 For hollow walls GW 850 °C, light blue</p> </div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 10px;"> <p>21554 4,3" Full Flat video touch screen, grey 21554.BN: neutral</p> </div> </div> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 10px;"> <p>21511 4,3" Full Flat touch screen, grey 21511.BN: neutral</p> </div> </div> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 10px;"> <p>21550 3,5" LCD monitor, grey 21550.B: white 21550.N: Next</p> </div> </div> <div style="display: flex; align-items: center;">  <div style="margin-left: 10px;"> <p>21618 4+4-module, with claws</p> </div> </div> </div>
	<p>Semi-flush mounting</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>V71318 For masonry GW 650 °C, light blue</p> </div> <div style="text-align: center;">  <p>V71718 For hollow walls GW 850 °C, light blue</p> </div> </div>	<div style="display: flex; align-items: center; justify-content: center;">  <div style="margin-left: 10px;"> <p>21553.1 10" IP multimedia video touch screen</p> </div> </div>

Eikon Evo: standard types of mounting

Cover plate	Material and finishing availability*							
	Primari	Esclusivi	Scolpiti	Naturali	Luminosi	Speciali (Corian®)	Raffinati	Essenziali
 <p>21668... 8-module (4+4) Dimensions: 154,7x154,7 mm</p>  <p>Cover plate rotated at a 90° angle</p>	●	●	●	●	●	●	●	●
 <p>21665... For multimedia video touch screen Dimensions: 345x250 mm</p>	Aluminium				Crystal			
	.11 Aluminium				.70 White diamond .76 Black Diamond			

* Cover plates range, page 104

Eikon Evo: German standard mounting

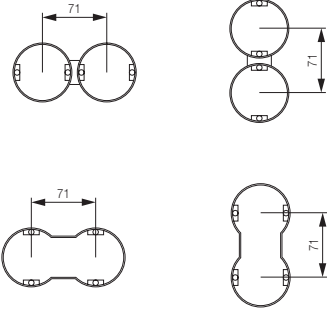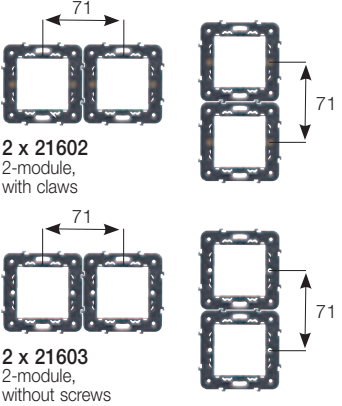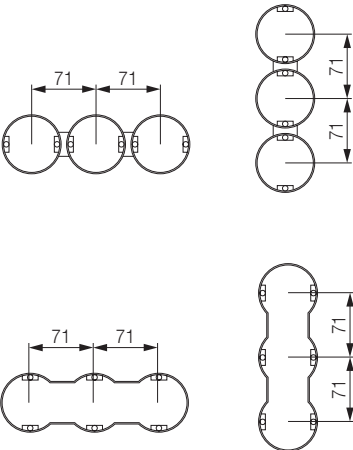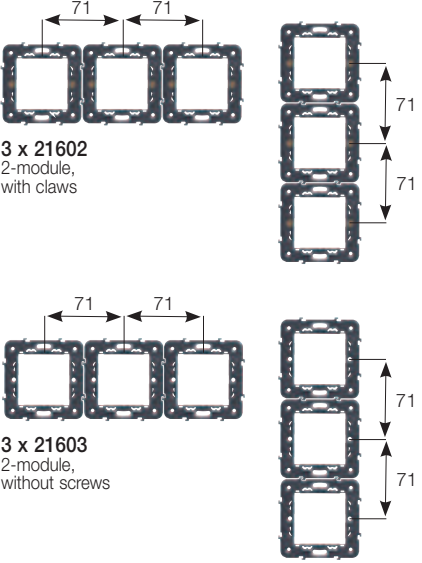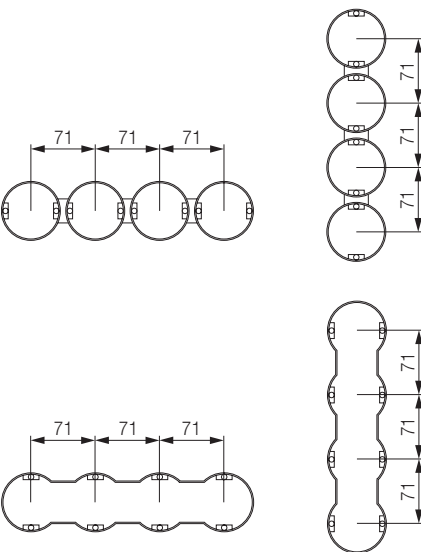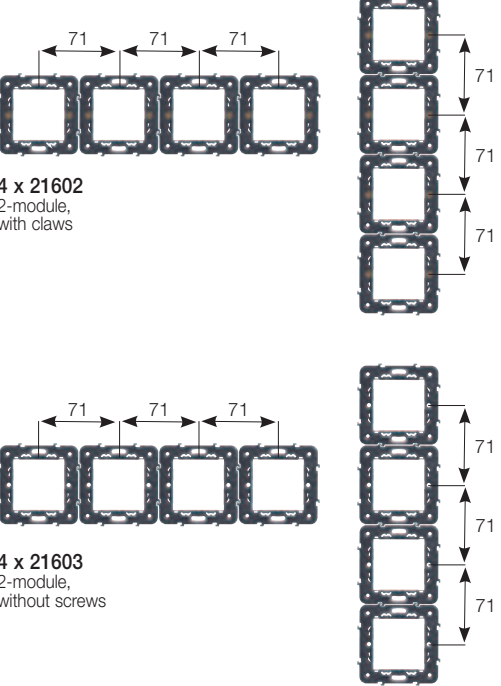

































Module	Box	Frame
<p>2 + 2 71 mm between centres</p>		 <p>2 x 21602 2-module, with claws</p> <p>2 x 21603 2-module, without screws</p>
<p>2 + 2 + 2 71 mm between centres</p>		 <p>3 x 21602 2-module, with claws</p> <p>3 x 21603 2-module, without screws</p>
<p>2 + 2 + 2 + 2 71 mm between centres</p>		 <p>4 x 21602 2-module, with claws</p> <p>4 x 21603 2-module, without screws</p>

Eikon Evo: German standard mounting





Cover plate	Material and finishing availability*							
	Primari	Esclusivi	Scolpiti	Naturali	Luminosi	Speciali (Corian®)	Raffinati	Essenziali
 <p>21643... 4-module (2+2), for horizontal and vertical installation. Dimensions: 166,4x95,4 mm</p>	●	●			●			●
 <p>21644... 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 237,4x95,4 mm</p>	●	●			●			●
 <p>21669... 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 308,4x95,4 mm</p>	●	●			●			●

* Cover plates range, page 104



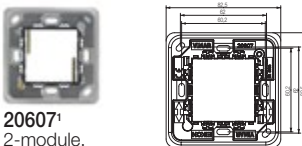



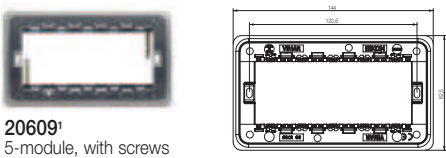

Eikon Evo cover plates: guideline

		2-module	3-module	4-module	7-module
					
Primari (Anodized aluminium)					
	Brilliant Aluminium	21642.01	21653.01	21654.01	21657.01
	Next Grey	21642.02	21653.02	21654.02	21657.02
	Lava Grey	21642.03	21653.03	21654.03	21657.03
	Neutral Bronze	21642.04	21653.04	21654.04	21657.04
	Dark Bronze	21642.05	21653.05	21654.05	21657.05
Esclusivi (Refined aluminium)					
	Black Sapphire	21642.06	21653.06	21654.06	21657.06
	Silver	21642.07	21653.07	21654.07	21657.07
	Titanium	21642.08	21653.08	21654.08	21657.08
	Polished gold	21642.09	21653.09	21654.09	21657.09
	Satin gold	21642.10	21653.10	21654.10	21657.10
Scolpiti (Carved stone)					
	Carrara white	21642.51	21653.51	21654.51	21657.51
	Natural split slate	21642.52	21653.52	21654.52	21657.52
	Grey quartzite	21642.53	21653.53	21654.53	21657.53
Naturali (Solid wood)					
	Italian walnut	21642.31	21653.31	21654.31	21657.31
	White Oak	21642.32	21653.32	21654.32	21657.32
	Wengé	21642.33	21653.33	21654.33	21657.33
Luminosi (Bevelled crystal)					
	White diamond	21642.70	21653.70	21654.70	21657.70
	Aqua	21642.71	21653.71	21654.71	21657.71
	Silver ice	21642.72	21653.72	21654.72	21657.72
	Pearl grey	21642.73	21653.73	21654.73	21657.73
	Opal brown	21642.74	21653.74	21654.74	21657.74
	Bronze mirror	21642.75	21653.75	21654.75	21657.75
	Black Diamond	21642.76	21653.76	21654.76	21657.76
Raffinati (Natural leather)					
	Cream	21642.21	21653.21	21654.21	21657.21
	Tobacco	21642.22	21653.22	21654.22	21657.22
Speciali (Corian®)					
	Glacier ice	21642.41	21653.41	21654.41	21657.41
Essenziali (Total aluminium and crystal)					
	Total White	21642.17	21653.17	21654.17	21657.17
	Total Black	21642.18	21653.18	21654.18	21657.18
	Total White Diamond	21642.87	21653.87	21654.87	21657.87
	Total Black Diamond	21642.88	21653.88	21654.88	21657.88




Eikon Evo cover plates: guideline

8-module	2+2-module (between centres 71 mm)	2+2+2-module (between centres 71 mm)	2+2+2+2-module (between centres 71 mm)
			
21668.01	21643.01	21644.01	21669.01
21668.02	21643.02	21644.02	21669.02
21668.03	21643.03	21644.03	21669.03
21668.04	21643.04	21644.04	21669.04
21668.05	21643.05	21644.05	21669.05
21668.06	21643.06	21644.06	21669.06
21668.07	21643.07	21644.07	21669.07
21668.08	21643.08	21644.08	21669.08
21668.09	21643.09	21644.09	21669.09
21668.10	21643.10	21644.10	21669.10
21668.51	-	-	-
21668.52	-	-	-
21657.53	-	-	-
21668.31	-	-	-
21657.32	-	-	-
21668.33	-	-	-
21668.70	21643.70	21644.70	21669.70
21668.71	21643.71	21644.71	21669.71
21668.72	21643.72	21644.72	21669.72
21668.73	21643.73	21644.73	21669.73
21668.74	21643.74	21644.74	21669.74
21668.75	21643.75	21644.75	21669.75
21668.76	21643.76	21644.76	21669.76
21668.21	-	-	-
21668.22	-	-	-
21668.41	-	-	-
21668.17	21643.17	21644.17	21669.17
21668.18	21643.18	21644.18	21669.18
21668.87	21643.87	21644.87	21669.87
21668.88	21643.88	21644.88	21669.88

Eikon Evo: British standard mounting

Module	Box	Frame
<p>1 and 2</p>	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p>20606¹ 1-module, with screws M 3,5, grey</p> <p>20606.B¹ 1-module, with screws M 3,5, white</p> <p>20606.N¹ 1-module, with screws M 3,5, Next</p>  <p>20607¹ 2-module, with screws M 3,5</p>
<p>Monobloc</p>	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p>20215.L Example of monobloc device</p> <p>20017.L Example of monobloc device</p>
<p>5 and Monobloc</p>	<p>Flush mounting</p>  <p>2-gang mounting box Fixing centres: 120,6 mm</p>	 <p>20609¹ 5-module, with screws M 3,5</p>  <p>20222.L Example of monobloc device in horizontal mounting</p> <p>20291 Example of monobloc device in vertical mounting</p>

Eikon Evo: British standard mounting




















Cover plate	Material and finishing availability*							
	Primari	Esclusivi	Scolpiti	Naturali	Luminosi	Speciali (Corian®)	Raffinati	Essenziali
 <p>21642... 2-module Dimensions: 94,7x94,7 mm</p>	●	●	●	●	●	●	●	●
 <p>■ 21648... 3-module Dimensions: 94,7x94,7 mm</p>	●	●	●	●	●	●	●	●
 <p>■ 21649... 5-module Dimensions: 162,3x94,7 mm</p>	●	●	●	●	●	●	●	●

¹ Items conform to BS 5733


















* Cover plates range, page 104

■ Please, contact the commercial network for further information

Eikon Evo British standard cover plates: guideline

	2-module	3-module	5-module
			
Primari (Anodized aluminium)			
 Brilliant Aluminium	21642.01	■ 21648.01	■ 21649.01
 Next Grey	21642.02	■ 21648.02	■ 21649.02
 Lava Grey	21642.03	■ 21648.03	■ 21649.03
 Neutral Bronze	21642.04	■ 21648.04	■ 21649.04
 Dark Bronze	21642.05	■ 21648.05	■ 21649.05
Esclusivi (Refined aluminium)			
 Black Sapphire	21642.06	■ 21648.06	■ 21649.06
 Silver	21642.07	■ 21648.07	■ 21649.07
 Titanium	21642.08	■ 21648.08	■ 21649.08
 Polished gold	21642.09	■ 21648.09	■ 21649.09
 Satin gold	21642.10	■ 21648.10	■ 21649.10
Scolpiti (Carved stone)			
 Carrara white	21642.51	■ 21648.51	■ 21649.51
 Natural split slate	21642.52	■ 21648.52	■ 21649.52
 Grey quartzite	21642.53	■ 21648.53	■ 21649.53
Naturali (Solid wood)			
 Italian walnut	21642.31	■ 21648.31	■ 21649.31
 White Oak	21642.32	■ 21648.32	■ 21649.32
 Wengé	21642.33	■ 21648.33	■ 21649.33

Eikon Evo British standard cover plates: guideline

	2-module	3-module	5-module
			
Luminosi (Bevelled crystal)			
 White diamond	21642.70	■ 21648.70	■ 21649.70
 Aqua	21642.71	■ 21648.71	■ 21649.71
 Silver ice	21642.72	■ 21648.72	■ 21649.72
 Pearl grey	21642.73	■ 21648.73	■ 21649.73
 Opal brown	21642.74	■ 21648.74	■ 21649.74
 Bronze mirror	21642.75	■ 21648.75	■ 21649.75
 Black Diamond	21642.76	■ 21648.76	■ 21649.76
Raffinati (Natural leather)			
 Cream	21642.21	■ 21648.21	■ 21649.21
 Tobacco	21642.22	■ 21648.22	■ 21649.22
Speciali (Corian®)			
 Glacier ice	21642.41	■ 21648.41	■ 21649.41
Essenziali (total aluminium and crystal)			
 Total White	21642.17	■ 21648.17	■ 21649.17
 Total Black	21642.18	■ 21648.18	■ 21649.18
 Total White Diamond	21642.87	■ 21648.87	■ 21649.87
 Total Black Diamond	21642.88	■ 21648.88	■ 21649.88

Primari

(Anodized aluminium)



01 Brilliant Aluminium



02 Next Grey



03 Lava Grey

Esclusivi

(Refined aluminium)



06 Black Sapphire



07 Silver



08 Titanium

Scolpiti

(Carved stone)



51 Carrara white



52 Natural split slate



53 Grey quartzite

Naturali

(Solid wood)



31 Italian walnut



32 White Oak



33 Wengé



04 Neutral Bronze



05 Dark Bronze



09 Polished gold



10 Satin gold

Luminosi

(Bevelled crystal)



70 White diamond



71 Aqua



72 Silver ice

Raffinati

(Natural leather)



21 Cream



22 Tobacco

Speciali

(Corian®)



41 Glacier ice

Essenziali

(Total aluminium and crystal)



17 Total white



18 Total black



87 Total white diamond



73 Pearl grey



74 Opal brown



75 Bronze mirror



76 Black diamond



























88 Total black diamond

Eikon Chrome and Eikon Total Look: Italian standard types of mounting

Module	Box	Frame	
2 for ø 60 mm mounting box	<p>Flush mounting</p>  <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p>  <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>	<p>Surface mounting</p>  <p>09971.A 43,5 deep, RAL 9001 ivory 09971.01: white 09971.SL: Silver</p>	  <p>21602 2-module, with claws</p>   <p>21603 2-module, without screws</p>
	2-central and 3	<p>Flush mounting</p>  <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p>  <p>V71703 For hollow walls GW 850 °C, light blue</p>	<p>Surface mounting</p>  <p>09983 35-45 mm deep, grey 09983.01: white 09983.N: Next</p>  <p>09975.A 43,5 mm deep, RAL 9001 ivory 09975.01: white 09975.SL: Silver</p>  <p>09976.04 30 mm deep, Idea white 09976.14: Idea grey</p>
4		<p>Flush mounting</p>  <p>V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black</p>  <p>V71704 For hollow walls GW 850 °C, light blue</p>	<p>Table mounting</p>  <p>20784 4-module table mounting box, grey 20784.B As above, white 20784.N As above, Next</p>
7	<p>Flush mounting</p>  <p>V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black</p>  <p>V71706 For hollow walls GW 850 °C, light blue</p>	<p>Table mounting</p>  <p>20787 7-module table mounting box, grey 20787.B As above, white 20787.N As above, Next</p>	  <p>21617 7-module, with screws</p>

Eikon Chrome and Eikon Total Look: Italian standard types of mounting

Eikon Chrome cover plate: material and finishing availability*						Eikon Total Look cover plate: material and finishing availability*	
Classic	Bright	Refined	Inox	Wood	Glass	Classic	Bright
 <p>▲20642... 2-module Dimensions: 85x85 mm</p>	●	●	●	●	●	 <p>20642... 2-module Dimensions: 85x85 mm</p>	●
 <p>▲20672... 2-module Dimensions: 80x80 mm</p>	●	●	●	●		 <p>20672... 2-module Dimensions: 80x80 mm</p>	●
 <p>▲20652... 2-central-module Dimensions: 120x85 mm</p>	●	●	●	●	●	 <p>20652... 2-central-module Dimensions: 120x85 mm</p>	●
 <p>▲20682... 2-central-module Dimensions: 120x80 mm</p>	●	●	●	●		 <p>20682... 2-central-module Dimensions: 120x80 mm</p>	●
 <p>▲20652... 2-central-module Dimensions: 120x85 mm</p>	●	●	●	●	●	 <p>20652... 2-central-module Dimensions: 120x85 mm</p>	●
 <p>▲20682... 2-central-module Dimensions: 120x80 mm</p>	●	●	●	●		 <p>20682... 2-central-module Dimensions: 120x80 mm</p>	●
 <p>▲20653... 3-module Dimensions: 120x85 mm</p>	●	●	●	●	●	 <p>20653... 3-module Dimensions: 120x85 mm</p>	●
 <p>▲20683... 3-module Dimensions: 120x80 mm</p>	●	●	●	●		 <p>20683... 3-module Dimensions: 120x80 mm</p>	●
 <p>▲20654... 4-module Dimensions: 142x85 mm</p>	●	●	●	●	●	 <p>20654... 4-module Dimensions: 142x85 mm</p>	●
 <p>▲20684... 4-module Dimensions: 142x80 mm</p>	●	●	●	●		 <p>20684... 4-module Dimensions: 142x80 mm</p>	●
 <p>▲20657... 7-module Dimensions: 206x85 mm</p>	●	●	●	●	●	 <p>20657... 7-module Dimensions: 206x85 mm</p>	●
 <p>▲20687... 7-module Dimensions: 210x80 mm</p>	●	●	●	●		 <p>20687... 7-module Dimensions: 210x80 mm</p>	●







* Cover plates range, from page 118 and 121

▲ New article



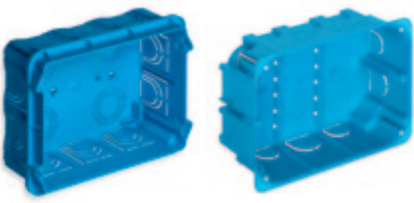





Eikon Chrome and Eikon Total Look: Italian standard types of mounting



Module	Box	Frame
8 (4+4)	<p>Flush mounting</p>  <p>V71318 For masonry GW 650 °C, light blue</p> <p>V71718 For hollow walls GW 850 °C, light blue</p>  <p>20788 8-module with Classic and Round frame, grey 20788.B white 20788.N Next Dimensions: 141x151,9x135 mm</p>	 <p>20550... Color monitor, LCD 3,5", with built-in 8-module frame</p>  <p>20511.1.... Color touch screen, 4,3", Energy, for control, 1 tempera- ture sensor input, with built-in 8-module frame</p> <p>20848.1... Color touch screen, 4,3", Well-contact Plus with built-in 8-module frame</p>  <p>21618 4+4-module, with claws</p>
1	<p>Panel mounting</p>  <p>16776.AU GW 960 °C</p>	 <p>20626 1-module, with screws</p>
2	 <p>16776.AU x 2 GW 960 °C</p>	 <p>20627 2-module, with screws</p>

Technopolymer cover plates

Module	Box	Frame
14 (7+7)	<p>Flush mounting</p>  <p>V71320 For masonry GW 650 °C, light blue</p> <p>V71720 For hollow walls GW 850 °C, light blue</p>  <p>09920.01, White 09920.14, Grey 09920.N, Next</p>	 <p>20620 14-module (7+7), with screws</p>
21 (7+7+7)	 <p>V71321 For masonry GW 650 °C, light blue</p>  <p>09921.01, White 09921.14, Grey 09921.N, Next</p>	 <p>20621 21-module (7+7+7), with screws</p>

Eikon Chrome and Eikon Total Look: Italian standard types of mounting






























Eikon Chrome cover plate: material and finishing availability*						Eikon Total Look cover plate: material and finishing availability*		
Classic  ▲20668... 8-module Dimensions: 142x156 mm	Bright	Refined	Inox	Wood	Glass	Classic  20668... 8-module Dimensions: 142x156 mm	Bright	
	●	●	●	●	●		●	
Round  ▲20698... 8-module Dimensions: 142x151 mm	Bright	Refined	Inox	Wood	Glass	Round  20698... 8-module Dimensions: 142x151 mm	Bright	
	●	●	●	●	●		●	
						Classic  20666... 2-module Dimensions: 40x80 mm	Round  20696... 1-module Dimensions: 40x80 mm	Bright .B01 white .N13 silver .15 anthracite
						Classic  20667... 2-module Dimensions: 40x137 mm	Round  20697... 2-module Dimensions: 40x137 mm	.B01 white .N13 silver .15 anthracite

	Material and finishing availability*
Classic  20660... 14-module (7+7), technopolymer, with signaling tags. Dimensions: 207x153 mm	Technopolymer .01 white .13 silver .15 anthracite
Classic  20661... 21-module (7+7+7), technopolymer, with signaling tags. Dimensions: 207x223 mm	Technopolymer .01 white .13 silver .15 anthracite







* Cover plates range, from page 118 and 121

▲ New article



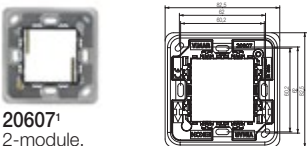



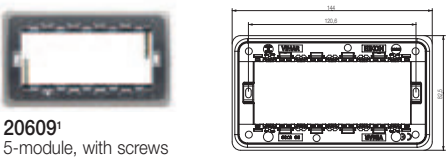

Eikon Chrome cover plates: guideline

	2-module		2-central-module		3-module	
						
	Classic	Round	Classic	Round	Classic	Round
Bright (Varnished metal)						
 Artic white	▲20642.C01	▲20672.C01	▲20652.C01	▲20682.C01	▲20653.C01	▲20683.C01
 Antique white	▲20642.C02	▲20672.C02	▲20652.C02	▲20682.C02	▲20653.C02	▲20683.C02
 Metallic champagne	▲20642.C07	▲20672.C07	▲20652.C07	▲20682.C07	▲20653.C07	▲20683.C07
 Metallic titanium	▲20642.C08	▲20672.C08	▲20652.C08	▲20682.C08	▲20653.C08	▲20683.C08
 Metallic Atlantic grey	-	▲20672.C09	-	▲20682.C09	-	▲20683.C09
 Metallic silver	▲20642.C10	▲20672.C10	▲20652.C10	▲20682.C10	▲20653.C10	▲20683.C10
 Metallic Siena	▲20642.C11	-	▲20652.C11	-	▲20653.C11	-
 Metallic anthracite	▲20642.C12	▲20672.C12	▲20652.C12	▲20682.C12	▲20653.C12	▲20683.C12
 Matt silver	▲20642.C13	▲20672.C13	▲20652.C13	▲20682.C13	▲20653.C13	▲20683.C13
 Matt titanium	▲20642.C14	▲20672.C14	▲20652.C14	▲20682.C14	▲20653.C14	▲20683.C14
 Matt anthracite	▲20642.C15	▲20672.C15	▲20652.C15	▲20682.C15	▲20653.C15	▲20683.C15
Refined (Refined metal)						
 Satin gold (with gold frame)	▲20642.G21	▲20672.G21	▲20652.G21	▲20682.G21	▲20653.G21	▲20683.G21
 Satin nickel	▲20642.C22	▲20672.C22	▲20652.C22	▲20682.C22	▲20653.C22	▲20683.C22
 Satin chrome	-	▲20672.C23	-	▲20682.C23	-	▲20683.C23
 Polished gold (with gold frame)	▲20642.G24	▲20672.G24	▲20652.G24	▲20682.G24	▲20653.G24	▲20683.G24
Inox (Stainless steel)						
 Brushed inox	▲20642.C91	▲20672.C91	▲20652.C91	▲20682.C91	▲20653.C91	▲20683.C91
Wood (Solid wood)						
 African wengé	▲20642.C31	-	▲20652.C31	-	▲20653.C31	-
 White oak	▲20642.C32	▲20672.C32	▲20652.C32	▲20682.C32	▲20653.C32	▲20683.C32
 Italian walnut	▲20642.C35	▲20672.C35	▲20652.C35	▲20682.C35	▲20653.C35	▲20683.C35
 American cherrywood	-	▲20672.C36	-	▲20682.C36	-	▲20683.C36
Glass (Crystal)						
 Black ice	▲20642.C71	-	▲20652.C71	-	▲20653.C71	-
 White ice	▲20642.C72	-	▲20652.C72	-	▲20653.C72	-
 Silver mirror	▲20642.C81	-	▲20652.C81	-	▲20653.C81	-

Eikon Chrome cover plates: guideline










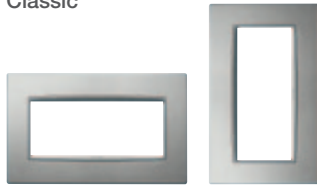
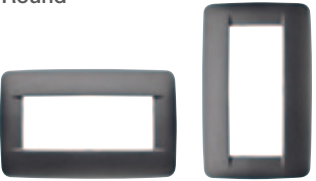
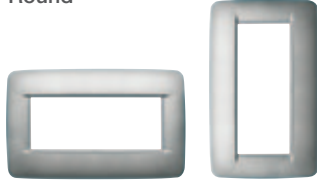
4-module		7-module		8-module	
					
Classic	Round	Classic	Round	Classic	Round
▲20654.C01	▲20684.C01	▲20657.C01	▲20687.C01	▲20668.C01	▲20698.C01
▲20654.C02	▲20684.C02	▲20657.C02	▲20687.C02	▲20668.C02	▲20698.C02
▲20654.C07	▲20684.C07	▲20657.C07	▲20687.C07	▲20668.C07	▲20698.C07
▲20654.C08	▲20684.C08	▲20657.C08	▲20687.C08	▲20668.C08	▲20698.C08
-	▲20684.C09	-	▲20687.C09	-	▲20698.C09
▲20654.C10	▲20684.C10	▲20657.C10	▲20687.C10	▲20668.C10	▲20698.C10
▲20654.C11	-	▲20657.C11	-	▲20668.C11	-
▲20654.C12	▲20684.C12	▲20657.C12	▲20687.C12	▲20668.C12	▲20698.C12
▲20654.C13	▲20684.C13	▲20657.C13	▲20687.C13	▲20668.C13	▲20698.C13
▲20654.C14	▲20684.C14	▲20657.C14	▲20687.C14	▲20668.C14	▲20698.C14
▲20654.C15	▲20684.C15	▲20657.C15	▲20687.C15	▲20668.C15	▲20698.C15
▲20654.G21	▲20684.G21	▲20657.G21	▲20687.G21	▲20668.G21	▲20698.G21
▲20654.C22	▲20684.C22	▲20657.C22	▲20687.C22	▲20668.C22	▲20698.C22
-	▲20684.C23	-	▲20687.C23	-	▲20698.C23
▲20654.G24	▲20684.G24	▲20657.G24	▲20687.G24	▲20668.G24	▲20698.G24
▲20654.C91	▲20684.C91	▲20657.C91	▲20687.C91	▲20668.C91	▲20698.C91
▲20654.C31	-	▲20657.C31	-	▲20668.C31	-
▲20654.C32	▲20684.C32	▲20657.C32	▲20687.C32	▲20668.C32	▲20698.C32
▲20654.C35	▲20684.C35	▲20657.C35	▲20687.C35	▲20668.C35	▲20698.C35
-	▲20684.C36	-	▲20687.C36	-	▲20698.C36
▲20654.C71	-	▲20657.C71	-	▲20668.C71	-
▲20654.C72	-	▲20657.C72	-	▲20668.C72	-
▲20654.C81	-	▲20657.C81	-	▲20668.C81	-

Eikon Chrome and Eikon Total Look: British standard types of mounting

Module	Box	Frame
<p>1 and 2</p>	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p>20606¹ 1-module, with screws M 3,5, grey</p> <p>20606.B¹ 1-module, with screws M 3,5, white</p> <p>20606.N¹ 1-module, with screws M 3,5, Next</p>  <p>20607¹ 2-module, with screws M 3,5</p>
<p>Monobloc</p>	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p>20215.L Example of monobloc device</p> <p>20017.L Example of monobloc device</p>
<p>5 and Monobloc</p>	<p>Flush mounting</p>  <p>2-gang mounting box Fixing centres: 120,6 mm</p>	 <p>20609¹ 5-module, with screws M 3,5</p>  <p>20222.L Example of monobloc device in horizontal mounting</p> <p>20291 Example of monobloc device in vertical mounting</p>

¹ Items conform to BS 5733






















Eikon Chrome and Eikon Total Look: British standard types of mounting

Eikon Chrome cover plate: material and finishing availability*						Eikon Total Look cover plate: material and finishing availability*	
	Bright	Refined	Inox	Wood	Glass		Bright
Classic  ▲20647'... 2-module Dimensions: 95x95x9 mm	●	●	●	●	●	Classic  20647'... 2-module Dimensions: 95x95x9 mm	●
Round  ▲20677'... 2-module Dimensions: 95x95x9 mm	●	●	●	●		Round  20677'... 2-module Dimensions: 95x95x9 mm	●
Classic  ▲20648'... Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.	●	●	●	●	●	Classic  20648'... Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.	●
Round  ▲20678'.. Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.	●	●	●	●		Round  20678'.. Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.	●
Classic  ▲20649'... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm	●	●	●	●	●	Classic  20649'... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm	●
Round  ▲20679'... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm	●	●	●	●		Round  20679'... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm	●















* Cover plates range, from page 118 and 121

▲ New article

Eikon Chrome cover plates for British standard: guideline

	2-module		Monobloc		5-module/monobloc	
						
	Classic	Round	Classic	Round	Classic	Round
Bright (Varnished metal)						
 Artic white	▲20647.C01	▲20677.C01	▲20648.C01	▲20678.C01	▲20649.C01	▲20679.C01
 Antique white	▲20647.C02	▲20677.C02	▲20648.C02	▲20678.C02	▲20649.C02	▲20679.C02
 Metallic champagne	▲20647.C07	▲20677.C07	▲20648.C07	▲20678.C07	▲20649.C07	▲20679.C07
 Metallic titanium	▲20647.C08	▲20677.C08	▲20648.C08	▲20678.C08	▲20649.C08	▲20679.C08
 Metallic Atlantic grey	-	▲20677.C09	-	▲20678.C09	-	▲20679.C09
 Metallic silver	▲20647.C10	▲20677.C10	▲20648.C10	▲20678.C10	▲20649.C10	▲20679.C10
 Metallic Siena	▲20647.C11	-	▲20648.C11	-	▲20649.C11	-
 Metallic anthracite	▲20647.C12	▲20677.C12	▲20648.C12	▲20678.C12	▲20649.C12	▲20679.C12
 Matt silver	▲20647.C13	▲20677.C13	▲20648.C13	▲20678.C13	▲20649.C13	▲20679.C13
 Matt titanium	▲20647.C14	▲20677.C14	▲20648.C14	▲20678.C14	▲20649.C14	▲20679.C14
 Matt anthracite	▲20647.C15	▲20677.C15	▲20648.C15	▲20678.C15	▲20649.C15	▲20679.C15
Refined (Refined metal)						
 Satin gold (with gold frame)	▲20647.G21	▲20677.G21	▲20648.G21	▲20678.G21	▲20649.G21	▲20679.G21
 Satin nickel	▲20647.C22	▲20677.C22	▲20648.C22	▲20678.C22	▲20649.C22	▲20679.C22
 Satin chrome	-	▲20677.C23	-	▲20678.C23	-	▲20679.C23
 Polished gold (with gold frame)	▲20647.G24	▲20677.G24	▲20648.G24	▲20678.G24	▲20649.G24	▲20679.G24

Eikon Chrome cover plates for British standard: guideline

	2-module		Monobloc		5-module/monobloc	
	 Classic	 Round	 Classic	 Round	 Classic	 Round
Inox (Stainless steel)						
 Brushed inox	▲20647.C91	▲20677.C91	▲20648.C91	20678.C91	20649.C91	20679.C91
Wood (Solid wood)						
 African wengé	▲20647.C31	-	▲20648.C31	-	▲20649.C31	-
 White oak	▲20647.C32	▲20677.C32	▲20648.C32	▲20678.C32	▲20649.C32	▲20679.C32
 Italian walnut	▲20647.C35	▲20677.C35	▲20648.C35	▲20678.C35	▲20649.C35	▲20679.C35
 American cherrywood	-	▲20677.C36	-	▲20678.C36	-	▲20679.C36
Glass (Crystal)						
 Black ice	▲20647.C71	-	▲20648.C71	-	▲20649.C71	-
 White ice	▲20647.C72	-	▲20648.C72	-	▲20649.C72	-
 Silver mirror	▲20647.C81	-	▲20648.C81	-	▲20649.C81	-

EIKON CHROME



Classic

Bright

(Varnished metal)



C01 Arctic white



C02 Antique white



C07 Metallic champagne



C08 Metallic titanium



C10 Metallic silver



C11 Metallic Siena



C12 Metallic anthracite



C13 Matt silver



C14 Matt titanium



C15 Matt anthracite

Refined

(Refined metal)



G21 Satin gold



C22 Satin nickel



G24 Polished gold

Inox

(Stainless steel)



C91 Brushed inox

Wood

(Solid wood)



C31 African wengé



C32 White oak



C35 Italian walnut

Glass

(Crystal)



C71 Black ice



C72 White ice



C81 Silver mirror

Note: changes in the grain, colour or evenness of the surface of cover plates made of solid wood and crystal are a prized feature and a guarantee of the material's authenticity.

EIKON CHROME



Round

Bright

(Varnished metal)



C01 Arctic white



C02 Antique white



C07 Metallic champagne



C08 Metallic titanium



C09 Metallic Atlantic grey



C10 Metallic silver



C12 Metallic anthracite



C13 Matt silver



C14 Matt titanium



C15 Matt anthracite

Refined

(Refined metal)



G21 Satin gold



C22 Satin nickel



C23 Satin chrome



G24 Polished gold

Inox

(Stainless steel)



C91 Brushed inox

Wood

(Solid wood)



C32 White oak































C35 Italian walnut



C36 American cherrywood










Eikon Total Look cover plates: guideline

	2-module		2-central-module		3-module		4-module	
								
	Classic	Round	Classic	Round	Classic	Round	Classic	Round
Bright (Varnished metal)								
 Artic white	20642.B01	20672.B01	20652.B01	20682.B01	20653.B01	20683.B01	20654.B01	20684.B01
 Matt silver	20642.N13	20672.N13	20652.N13	20682.N13	20653.N13	20683.N13	20654.N13	20684.N13
 Matt anthracite	20642.15	20672.15	20652.15	20682.15	20653.15	20683.15	20654.15	20684.15
Reflex (Technopolymer)								
 Reflex graphite	20642.40	-	20652.40	-	20653.40	-	20654.40	-
 Reflex ice (with white frame)	20642.B41	-	20652.B41	-	20653.B41	-	20654.B41	-

	7-module		8-module		14-module		21-module		Panel mounting 1-module		Panel mounting 2-module	
												
	Classic	Round	Classic	Round	Classic	Classic	Classic	Round	Classic	Round		
Bright (Varnished metal)												
 Artic white	20657.B01	20687.B01	20668.B01	20698.B01	20660.01*	20661.01*	20666.B01	20696.B01	20667.B01	20697.B01		
 Matt silver	20657.N13	20687.N13	20668.N13	20698.N13	20660.13*	20661.13*	20666.N13	20696.N13	20667.N13	20697.N13		
 Matt anthracite	20657.15	20687.15	20668.15	20698.15	20660.15*	20661.15*	20666.15	20696.15	20667.15	20697.15		
Reflex (Technopolymer)												
 Reflex graphite	20657.40	-	20668.40	-	-	-	-	-	-	-		
 Reflex ice (with white frame)	20657.B41	-	20668.B41	-	-	-	-	-	-	-		

* Technopolymer

Eikon Total Look cover plates for British standard: guideline

	2-module		Monobloc		5-module/monobloc	
						
	Classic	Round	Classic	Round	Classic	Round
Bright (Varnished metal)						
 Artic white	20647.B01	20677.B01	20648.B01	20678.B01	20649.B01	20679.B01
 Matt silver	20647.N13	20677.N13	20648.N13	20678.N13	20649.N13	20679.N13
 Matt anthracite	20647.15	20677.15	20648.15	20678.15	20649.15	20679.15

Classic

Bright (Varnished metal)



B01 Arctic white



N13 Matt silver



15 Matt anthracite

Round

Bright (Varnished metal)



B01 Arctic white



























N13 Matt silver



15 Matt anthracite

Isoset

Modules	IP40	IP55	IP55 cover
1	 14801	 14901	
2	 14802*	 14902	 14931** with claws  14932** with screws
3	 14803	 14903	 14943**
4	 14804	 14904	 14944**
6	 14813*		**) For white version, add to the basic code: .01 For granite version, add to the basic code: .14
	 14827		
8	 14814*	 14912	
	 14837		
	 14832		
10	 14815*		
12	 14838	 14913	
	 14833		
14	 14817*		
16	 14839		

Customization

Devices and cover plates customization

Vimar laser technology allows the reproduction of any name, logotype or trademark, with absolute precision and indelebility, even for small quantities.

Information

- all devices, buttons and cover plates are customized depending on conditions described below;
- **Eikon Evo**
the following finishings of cover plates are not customizable: **Crystal: silver ice (72), pearl grey (73), opal brown (74), bronze mirror (75); Natural leather: tobacco (22);**
- **Eikon Chrome**
the following finishings of cover plates are not customizable: **Bright: matt titanium (.C14); Glass: black ice (.C71), silver mirror (.C81);**
- **Wooden cover plate** customization: prices and quantities agreed with the commercial networks.
- if the required customisation is listed in the table "Standard symbols and wordings", indicate the relative code in addition to the required item code, **if it is not included in the table contact the Vimar sales office to check availability;**
- the customisation is **visible in the dark**: on the bottom of rocker controls and buttons, with the standard symbols available from the catalogue; in the centre on axial controls and buttons, with the standard symbols available from the catalogue; on the bottom of interchangeable rocker buttons (20031..., 20032... e 20033...) with customisable spaces; in the centre of interchangeable axial buttons (20131.0... and 20132.0...) with customisable spaces;
- the interchangeable axial buttons (20131.0..., 20132.0...) can be customised by applying a Mylar label in the given space. For large quantities, customisations not included in the "Standard symbols and wordings" or for laser-printed customisations, please contact the Vimar sales department.

Laser customization advantages

- indelible engraving that does not deteriorate over time;
- high-precision reproduction even of very fine lines and complex images;
- service available even for minimal quantities;
- possibility of ordering the same customization at different times with identical results.

The few limits of technology

- it is not possible to reproduce coloured images.

What to supply

- a printout of the image to be reproduced, in black-and-white line drawing scaled 2 or 3 times larger than the finished size;
- an image in EPS, TIFF or JPEG format of the subject to be reproduced.

Things to avoid

- do not provide photocopies;
- do not fax the image to be reproduced, because the low definition of the fax makes it impossible to reproduce the customization with the high quality of laser system.

How to proceed


- enclose (without paper clips, staples or adhesive tape) or send the image to be reproduced;
- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

Cover plates, switches and buttons customization




Customizable positions

Cover plates

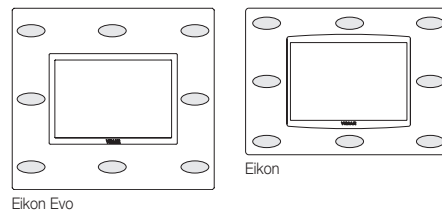

Buttons and switches

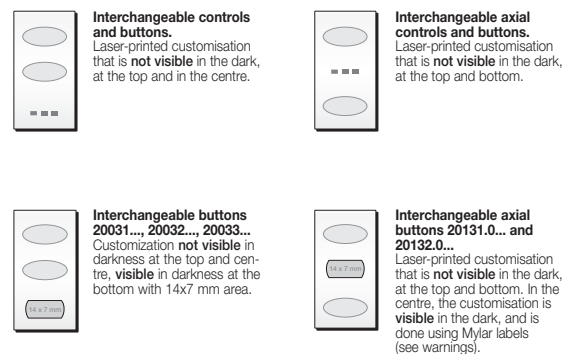

Standard symbols and wordings (♦ symbols already on product catalogue)

♦64	♦65	♦66	67	68	69	70	71	72	73	74
ON	OFF									
75	76	77	78	79	80	81	82	83	84	85
			OPEN	CLOSE	ALARM	DO NOT DISTURB	COME IN	BACK	LIGHT	GENERAL
86	87	88	289	290	91	92	293	294	295	296
OUTSIDE	GARAGE	GARDEN	BATHROOM	CELLAR	STOREROOM	STAIRS	ATTIC	TERRACE		
297	298	299	2100	2101	2102	2103	2104	2105	106	107

Smart card customization

Black-and-white customization in the rear side of smart, ISO and transponder cards.



B.C14005 EN 1401
8 007352 505650



Viale Vicenza, 14
36063 Marostica VI - Italy
Tel. +39 0424 488 600
Fax +39 0424 488 709
www.vimar.com